Mechanical Addendum One

April 14, 2015

NOTE: The following amendments, additions, and deletions shall be made to the Construction Documents and Contract Documents. Insofar as those documents are at variance with this Addendum, this Addendum shall govern.

Drawings

- Item No. Description
- 1. <u>Revision:</u> Reference Drawing M-1, Site Plan Renovation. Refer to Notes to Sheet 4. This note should be deleted and in all instances replace with Note to Sheet 3. There is no existing pipe that will have guides added. All guides will be in new pipe.

Specifications

Item No. Description

- 2. <u>Revision:</u> Reference Project Manual. Replace the "USC Supplemental General Conditions for Construction Projects" with the attached revised supplemental conditions dated 2/2015.
- 3. <u>Revision:</u> Reference Section 15180 Insulation. Underground buried pipe shall be insulation with foam glass and jacketed with Pittwrap jacketing per manufacturer's instructions.

Clarifications

Item No. Description

4. <u>Clarification:</u> An additional site visit has been scheduled on Thursday April 16 at 10:00 at the East Energy Plant 801 Henderson St.

East Tunnel Condensate Line Replacement Project University of South Carolina Project Number CP00422861

5. <u>Clarification:</u> Asbestos Abatement will be included in this project. A supplement scope description will be issued in Addendum 2. Some contractors that can be contacted include but are not limited to:

R&R, Randy Fields 803-3513-3147 Asbestos and Demolition, Don Buchanan 803-513-3762

- 6. <u>Clarification:</u> The intent is to start the project as soon as possible.
- 7. <u>Clarification:</u> The contractor will have access above ground at vault G2-4D to bring pipe through the vault cover. If this area is to be used for laydown, access, and general construction, then the area will be required to be fenced off with 6' tall chain link fencing with green screen covers, to protect the work area from pedestrian traffic.
- 8. <u>Clarification:</u> Parking will be provided in lot B-6 near the EST Energy Plant.
- 9. <u>Clarification:</u> The drip leg on the steam pipe at the new trap will remain in place. Only the drip pipe and trap will be replaced.
- 10. <u>Clarification:</u> The expansion joints will be rated for 150#.

END OF ADDENDUM

Attachments

Revised USC Supplemental General Conditions for Construction Projects 2/2015 Pre-Bid Sign In Sheet

USC SUPPLEMENTAL GENERAL CONDITIONS FOR CONSTRUCTION PROJECTS

WORK AREAS

- 1. The Contractor shall maintain the job site in a safe manner at all times. This includes (but is not limited to) the provision and/or maintenance of lighting, fencing, barricades around obstructions, and safety and directional signage.
- 2. Contractor' s employees shall take all reasonable means not to interrupt the flow of student traffic in building corridors, lobbies, stairs and exterior walks. All necessary and reasonable safety precautions shall be taken to prevent injury to building occupants while transporting materials and equipment through the work area. Providing safe, accessible, plywood-shielded pedestrian ways around construction may be required if a suitable alternative route is not available.
- 3. At the beginning of the project, the USC Project Manager will establish the Contractor's lay-down area. This area will also be used for the Contractor's work vehicles. The lay-down area will be clearly identified to the contractor by the Project Manager, with a sketch or drawing provided to USC Parking Services. In turn, Parking Services will mark off this area with a sign containing the project name, Project Manager's name, Contractor name and contact number, and end date. Where this area is subject to foot traffic, protective barriers will be provided as specified by the Project Manager. The area will be maintained in a neat and orderly fashion.
- 4. Work vehicles parked in the lay down area (or designated parking areas) will be clearly marked and display a USC-furnished placard for identification. No personal vehicles will be allowed in this area, or in any areas surrounding the construction site. Personal vehicles must be parked in the perimeter parking lots or garages. Temporary parking permits can be obtained at the Contractor's expense at the USC Parking Office located in the Pendleton Street parking garage. Refer to the CAMPUS VEHICLE EXPECTATIONS (below) for additional information.
- 5. Contractor is responsible for removal of all debris from the site, and is required to provide the necessary dumpsters which will be emptied on a regular basis. Construction waste must not be placed in University dumpsters. The construction site must be thoroughly cleaned with all trash picked up and properly disposed of on a daily basis and the site must be left in a safe and sanitary condition each day. The University will inspect job sites regularly and will fine any contractor found to be in violation of this requirement an amount of up to \$1,000 per violation.
- 6. The Contractor shall be responsible for erosion and sediment control measures where ground disturbances are made.

PROJECT FENCING

- 7. All construction projects with exterior impacts shall have construction fencing at the perimeter. Fencing shall be 6' chain link with black or green privacy fabric (80-90% blockage). For fence panels with footed stands, sandbag weights shall be placed on the inside of the fence. Ripped sandbags shall be replaced immediately.
- 8. For projects with long fencing runs and/or high profile locations, decorative USC banners shall be used on top of privacy fabric; banners should be used at a ratio of one banner for every five fence panels. USC Project Manager will make arrangements for banner delivery for Contractor to hang.
- 9. The use of plastic safety fencing is discouraged and shall only be used on a temporary basis (less than four weeks) where absolutely necessary. Safety fencing shall be a neon yellow-green, high-

visibility fencing equal to 'Kryptonight' by Tenax. Safety fencing shall be erected and maintained in a neat and orderly fashion throughout the project.

10. Vehicles and all other equipment shall be contained within a fenced area if they are on site for more than 3 consecutive calendar days.

BEHAVIOR

- 11. Fraternization between Contractor's employees and USC students, faculty or staff is strictly prohibited.
- 12. USC will not tolerate rude, abusive or degrading behavior on the job site. Heckling and cat-calling directed toward students, faculty or staff or any other person on USC property is strictly prohibited. Any contractor whose employees violate this requirement will be assessed a fine of up to \$500 per violation.
- 13. Contractor's employees must adhere to the University's policy of maintaining a drug-free and tobacco-free campus.

HAZARDOUS MATERIALS & SAFETY COMPLIANCE

- 14. A USC Permit to Work must be signed prior to any work being performed by the general contractor or sub-contractor(s).
- 15. The contractor will comply with all regulations set forth by OSHA and SCDHEC. Contractor must also adhere to USC's internal policies and procedures (available by request). Upon request, the contractor will submit all Safety Programs and Certificates of Insurance to the University for review.
- 16. Contractor must notify the University immediately upon the discovery of suspect material which may contain asbestos or other such hazardous materials. These materials must not be disturbed until approved by the USC Project Manager.
- 17. In the event of an OSHA inspection, the Contractor shall immediately call the Facilities Call Center, 803-777-4217, and report that an OSHA inspector is on site. An employee from USC's Safety Unit will arrive to assist in the inspection.

LANDSCAPE & TREE PROTECTION

- 18. In conjunction with the construction documents, the USC Arborist shall direct methods to minimize damage to campus trees. Tree protection fencing is required to protect existing trees and other landscape features to be affected by a construction project. The location of this fence will be evaluated for each situation with the USC Arborist, Landscape Architect and Project Manager. Tree protection fencing may be required along access routes as well as within the project area itself. Fence locations may have to be reset throughout the course of the project.
- 19. The tree protection fence shall be 6' high chain link fence with 80-90% privacy screening unless otherwise approved by USC Arborist and/or Landscape Architect. If the tree protection fence is completely within a screened jobsite fence perimeter, privacy fabric is not required. In-ground fence posts are preferred in most situations for greater protection. If utility or pavement conflicts are present, fence panels in footed stands are acceptable. See attached detail for typical tree protection fencing.
- 20. No entry, vehicle parking, or materials storage will be allowed inside the tree protection zone. A 4"

layer of mulch shall be placed over the tree protection area to maintain moisture in the root zone.

- 21. Where it is necessary to cross walks, tree root zones (i.e., under canopy) or lawns the following protective measures shall be taken:
 - a. For single loads up to 9,000 lbs., a 3/4" minimum plywood base shall be placed over 4" of mulch.
 - b. For single loads over 9,000 lbs., two layers of 3/4" plywood shall be placed over 4" of mulch.
 - c. Plywood sheets shall be replaced as they deteriorate or delaminate with exposure.
 - d. For projects requiring heavier loads, a construction entry road consisting of 10' X 16' oak logging mats on 12" coarse, chipped, hardwood base. Mulch and logging mats shall be supplemented throughout the project to keep matting structurally functional.
- 22. Damage to any trees during construction shall be assessed by the USC Arborist, who will stipulate what action will be taken for remediation of damage. The cost of any and all remediation will be assumed by the contractor at no additional cost to the project. Compensation for damages may be assessed up to \$500 per caliper inch of tree (up to 8") and \$500 per inch of diameter at breast height (for trees over 8").
- 23. Damage to trunks and limbs, as well as disturbance of the root zone under the dripline of tree, including compaction of soil, cutting or filling, or storage of materials, shall qualify as damage and subject to remediation.
- 24. Any damage to existing pavements or landscaping (including lawn areas and irrigation) will be remediated before final payment is made.

TEMPORARY FACILITIES

- 25. Contractor will be responsible for providing its own temporary toilet facilities, unless prior arrangements are made with the USC Project Manager.
- 26. Use of USC communications facilities (telephones, computers, etc.) by the Contractor is prohibited, unless prior arrangements are made with the USC Project Manager.

CAMPUS KEYS

27. Contractor must sign a Contractor Key Receipt/Return form before any keys are issued. Keys must be returned immediately upon the completion of the work. The Contractor will bear the cost of any re-keying necessary due to the loss of or failure to return keys.

WELDING

28. A welding (hot work) permit must be issued by the University Fire Marshall before any welding can begin inside a building. The USC Project Manager will coordinate.


PROJECT EVALUATION & CLOSE-OUT

- 29. For all projects over \$100,000, including IDCs, a Contractor Performance Evaluation (SE 395) will be reviewed with the GC at the beginning of the project and a copy given to the GC. At the end of the project the form will be completed by the USC Project Manager and a Construction Performance rating will be established.
- 30. Contractor must provide all O&M manuals, as-built drawings, and training of USC personnel on new equipment, controls, etc. prior to Substantial Completion. Final payment will not be made until

this is completed.

CAMPUS VEHICLE EXPECTATIONS

- 31. Personal vehicles must be parked in the perimeter parking lots or garages. Temporary parking permits can be obtained at the Contractor's expense at the USC Parking Office located in the Pendleton Street parking garage.
- 32. All motorized vehicle traffic on USC walkways and landscape areas must be approved by the USC Project Manager and Parking Division, have a USC parking placard, and be parked within the approved laydown area. Violators may be subject to ticketing, towing and fines.
- 33. All motorized vehicles that leak or drip liquids are prohibited from traveling or parking on walks or landscaped areas.
- 34. Drivers of equipment or motor vehicles that damage university hardscape or landscape will be held responsible for damages and restoration expense.
- 35. All vehicles parked on landscape, hardscape, or in the process of service delivery, must display adequate safety devices, i.e. flashing lights, cones, signage, etc.
- 36. All drivers of equipment and vehicles shall be respectful of University landscape, equipment, structures, fixtures and signage.
- 37. All incidents of property damage shall be reported to Parking Services or the Work Management Center.

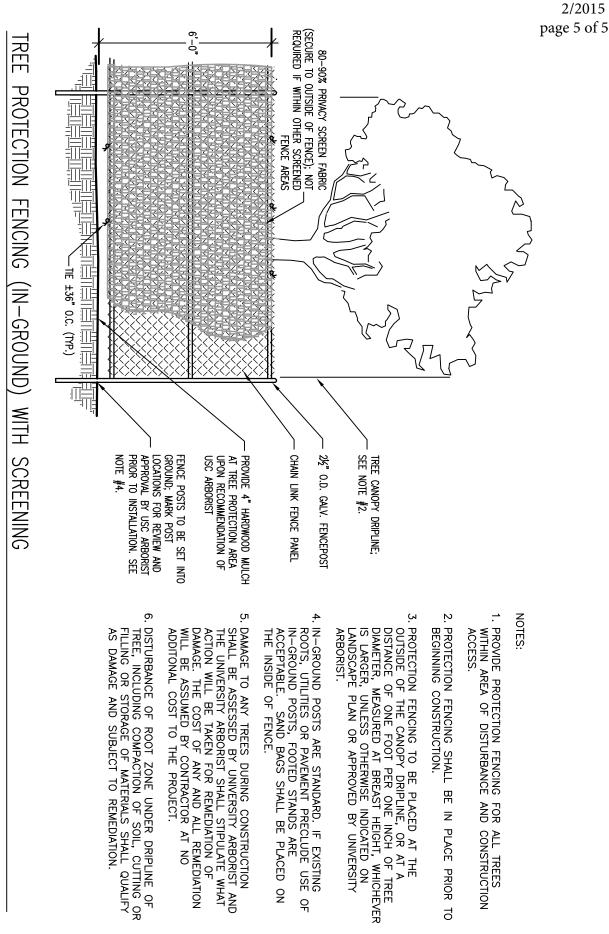

NO SCALE REVISED 8.28.14



University of South Carolina Pre Bid Conference Sign In Sheet Columbia, SC

Project Name, Number & Project Manager: Pre Bid Conference Date & Time: East Tunnel Condensate Line Replacement Project/CP00422861/Troy Nelson April 13, 2015 10AM 743 Greene Street; Conf Room 053; Cola SC 29208

Name	Company	Address	Phone #	Email
TRAVIS White	WATKER White Inc.	5728 Shakas 200 Rd Colu 29012	803-691-052	Thite Walker - White
Rear Boyce	N N N)/))	303 513 7904	R Boyce @Walker- White . com
RANDY WEDTH	ZULLY INTL	3547 MEETING ST N. CHARLESTON, SC 29405	\$ 843 414 8500	rworth@zuukkail.com
Pere Itabin	Cuyce Company Juc.	307 Dooley Rd. Lexnighn S.C. 29070	(803)240-6837	petcharbin@ayeecompany.com
Chris Gay	050	743 Greene St Colubia Si 24357	833-371-6761	CS-Rary O fore st. ads
BEN LIRISATES	USC	743 GREENE 57 COLA S.C. 29208	803-0273	LIRBATES@ FMC. SC. EDU
Aimee Rish	USC FACILities Procurement	743 Greene St 29208	803-777-2261	arishatme. sc.ec.
Troy Nelson	USC Energy	743 Growne St. Oda, 50		trebaresc.edu
Rado Moldovan	USC Energy	7436reenest 29208	803 777 3593	moldovan Ofme.sc.

*Please make sure you list your company name as registered with LLR.

* By signing and providing your email address, you are authorizing the University of South Carolina to send you information electronically.



University of South Carolina Pre Bid Conference Sign In Sheet Columbia, SC

Project Name, Number & Project Manager: Pre Bid Conference Date & Time: East Tunnel Condensate Line Replacement Project/CP00422861/Troy Nelson April 13, 2015 10AM 743 Greene Street; Conf Room 053; Cola SC 29208

Name	Company	Address	Phone #	Email	
CASEY RAGESTALE	MSI CONST. Co.	W. ColA. S.C.	803-606-8215	CASEY PAGelole @ MSTC	2057, COM
DALA CALATTE DAVA	MSI		608 -1774	DANS (UNTILE BAUM DUIS I COMST. COM	
SKI HIGGINS	QUATE HUDUSTRIAK	DERMAN, N. C.	919-596-5913	Shingins @ Quata uto ste	nt, con
B.B.Bell	Gregory Industrial	2124 College St. Columbia, S.C. PO. Box 4925	803-748-1742	bbbell equegory industrial	scom
Tracy Coffey	PIEDMONT MECH.	10. 100x 21 425 Spartanbargi 62	864-578-9114	tracycepiedmontred	hauical.
BILL LIVINGSTOR	SWYGERT : ASSUZIATES		791-9300	BILLE SWYGERF - ASSOCIAIZS, COM	Com
*Please make sure you list your company name as re	eistered with U.R.				

*Please make sure you list your company name as registered with LLR.

* By signing and providing your email address, you are authorizing the University of South Carolina to send you information electronically.