

NO.	DATE	REVISIONS

NO.	DATE	REVISIONS




LEGEND

DEMOLITION	EXISTING	DESCRIPTION
N/A	BENCHMARK/CONTROL POINT	BENCHMARK/CONTROL POINT
N/A	PROPERTY LINE/RIGHT OF WAY	PROPERTY LINE/RIGHT OF WAY
N/A	BUILDING	BUILDING
N/A	LIGHT POLE	LIGHT POLE
N/A	TREE	TREE
N/A	BILUMINOUS SURFACE	BILUMINOUS SURFACE
N/A	CONCRETE SURFACE	CONCRETE SURFACE
N/A	CONTOUR	CONTOUR
N/A	SPOT ELEVATION	SPOT ELEVATION
N/A	CHAIN LINK FENCE	CHAIN LINK FENCE
N/A	WATER VALVE	WATER VALVE
N/A	WATER METER	WATER METER
N/A	UNDERGROUND ELECTRIC LINE	UNDERGROUND ELECTRIC LINE
N/A	W/LIGHT POLE	W/LIGHT POLE
N/A	SANITARY SEWER LINE W/MANHOLE	SANITARY SEWER LINE W/MANHOLE
N/A	SANITARY SEWER CLEANOUT	SANITARY SEWER CLEANOUT
N/A	STORM DRAIN LINE W/STRUCTURE	STORM DRAIN LINE W/STRUCTURE
N/A	KEY NOTE REFERENCE	KEY NOTE REFERENCE



KEY NOTES





- REMOVE EXISTING CONCRETE CURB AND GUTTER AS REQUIRED FOR NEW CONSTRUCTION
- REMOVE EXISTING SIGN AND REINSTALL FOLLOWING CONSTRUCTION
- SEE ARCH PLANS FOR DIRECTION ON REMOVAL OF EXISTING HANDRAIL
- PERFORM PRIVATE UTILITY LOCATE WITHIN EXPANDED FORCE MAIN AND RAMP PRIOR TO ANY EXCAVATION TO VERIFY LOCATION OF EXISTING WATER LINES

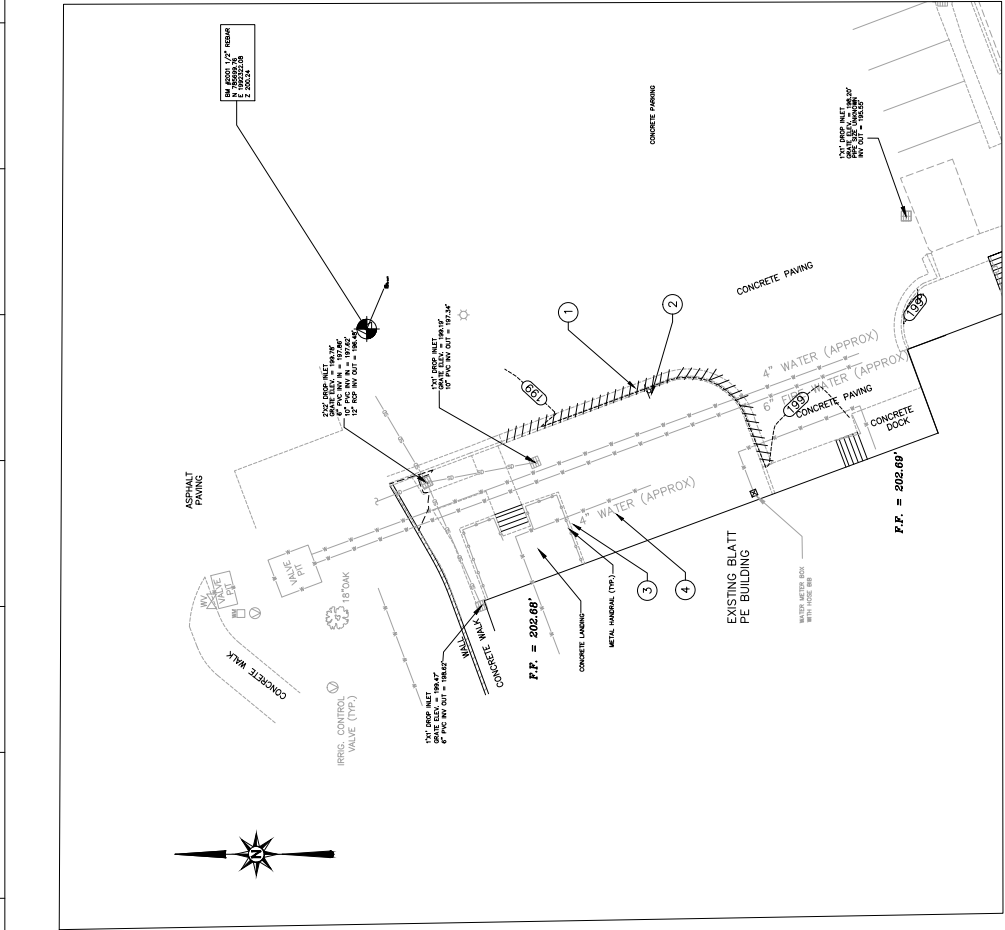

GENERAL NOTES

- TOPOGRAPHIC SURVEY WAS COMPLETED BY POWER ENGINEERING CONSULTING ENGINEERS. ALL DIMENSIONS AND LOCATIONS SHOWN ON THIS SURVEY WERE PERFORMED BY R.B. TODD CONSULTING ENGINEERS.
- OWNER: USC FACILITIES
 743 GREENE STREET
 COLUMBIA, SC 29208
 PHONE NUMBER: 803-777-5811
 TMS: R11303-09-01
 ZONING: C-1
 DEVELOPMENT ADDRESS: 1300 Wheat Street, Columbia SC 29208
 DISTURBED AREA: 0.04 ACRES
- ACCORDING TO FEMA FLOOD INSURANCE RATE MAP 45079C0094H, DATED FEBRUARY 20, 2002, A PORTION OF THIS PROPERTY IS LOCATED IN FLOOD ZONE "AE".
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO CONSTRUCTION OF ANY DISCREPANCIES BETWEEN THESE PLANS AND ACTUAL FIELD CONDITIONS.
- THE CONTRACTOR SHALL NOTIFY PUPS AT 1-888-721-7877 AT LEAST 72 HOURS PRIOR TO CONSTRUCTION TO HAVE ALL UNDERGROUND UTILITIES LOCATED.





GENERAL NOTES

- TOPOGRAPHIC SURVEY WAS COMPLETED BY POWER ENGINEERING COMPANY ON FEBRUARY 15, 2014. NO BOUNDARY OR TOPOGRAPHIC SURVEY WAS PERFORMED BY R.B. TODD CONSULTING ENGINEERS.
- OWNER: USC FACILITIES
743 GREENE STREET
COLUMBIA, SC 29201
PHONE NUMBER: 803-777-5811
TMS: R11303-09-01
ZONING: C-1
DEVELOPMENT ADDRESS: 1300 Wheat Street, Columbia SC 29205
DISTURBED AREA: 0.04 ACRES
- ACCORDING TO FEMA FLOOD INSURANCE RATE MAP 45079C0094H, THE DISTURBED AREA IS IN FLOOD ZONE "AE".
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO CONSTRUCTION OF ANY DISCREPANCIES BETWEEN THESE PLANS AND ACTUAL FIELD CONDITIONS.
- THE CONTRACTOR SHALL NOTIFY RIPS AT 1-888-724-7877 AT LEAST 72 HOURS PRIOR TO CONSTRUCTION TO HAVE ALL UNDERGROUND UTILITIES LOCATED.

RBTODD CONSULTING ENGINEERS
4436 Brook River Road, Suite 212
Ft. Mill, S.C. 29663
Tel: 803.781.5143
Fax: 803.781.5143
www.rbtodd.com

GARVIN DESIGN GROUP
1309 Lincoln Street
P.O. Box 18
Columbia, SC 29202

BLATT PC CENTER - BIKE SHOP RAMP
1300 Wheat Street
Columbia, SC 29208
Project No. CP00424897





KEY NOTES

- NEW ELEVATED BIKE PARKING - SEE ARCH AND STRUCTURAL PLANS
- SEE ARCH FOR HANDRAIL DETAILS
- NEW 6" WIDE BIKE RAMP WITH HANDRAILS - SEE ARCH/STRUCTURAL LIGHT POLE
- REMOVE AND REPLACE CURB AND GUTTER AS REQUIRED FOR CONSTRUCTION

LEGEND

NEW	EXISTING	DESCRIPTION
N/A	+	BENCHMARK/CONTROL POINT
N/A	○	BUILDING
N/A	□	LIGHT POLE
N/A	○	CURB AND GUTTER
N/A	○	CONCRETE SURFACE
N/A	○	BITUMINOUS SURFACE
①	N/A	KEY NOTE REFERENCE

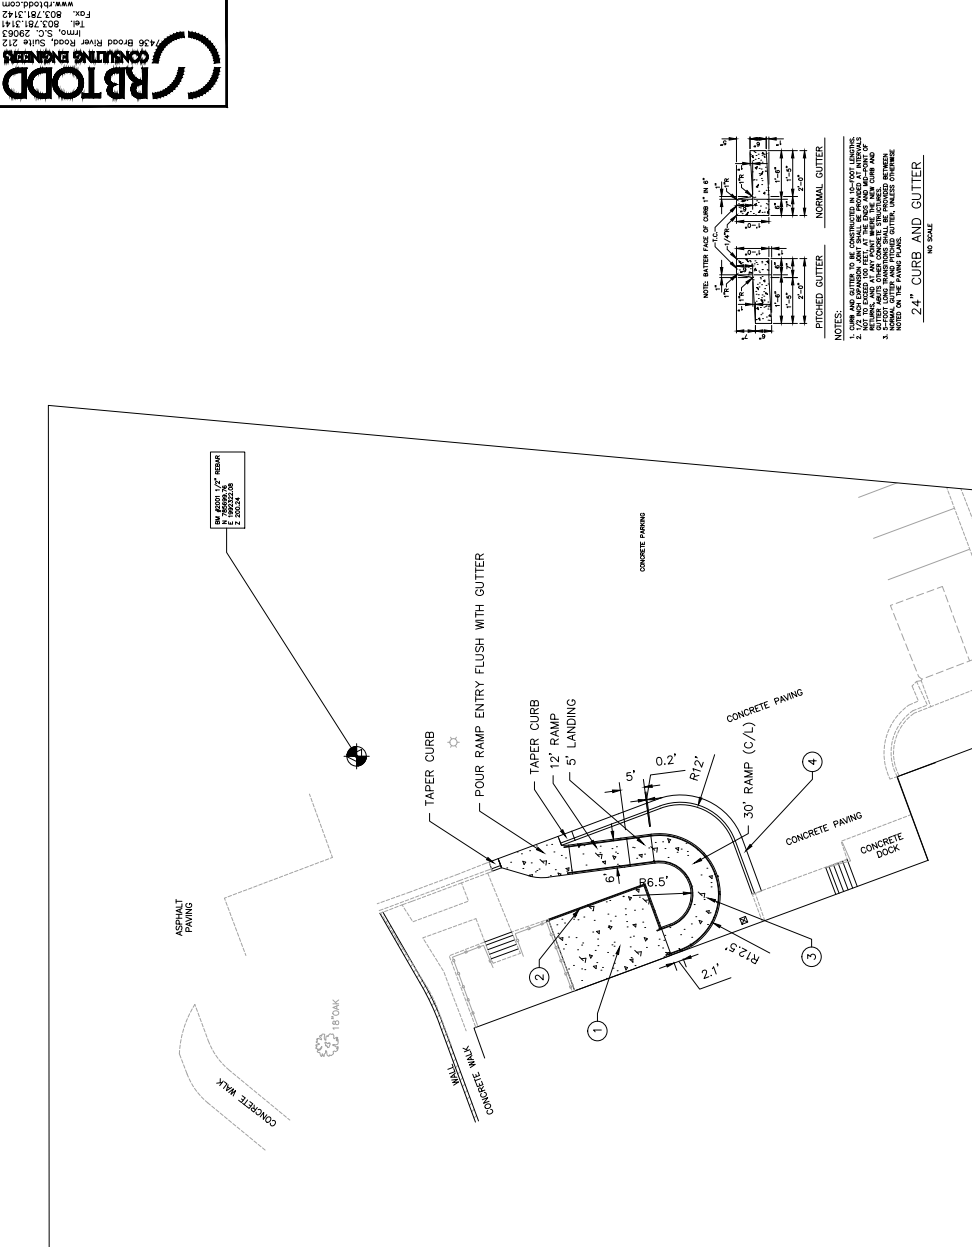

GARVIN DESIGN GROUP
1309 Lincoln Street
P.O. Box 18
Columbia, SC 29202

RBTODD CONSULTING ENGINEERS
4436 Brook River Road, Suite 212
Ft. Mill, S.C. 29663
Tel: 803.781.5143
Fax: 803.781.5143
www.rbtodd.com

BLATT PC CENTER - BIKE SHOP RAMP
1300 Wheat Street
Columbia, SC 29208
Project No. CP00424897

PROFIT TITLE

NO.	DATE	DESCRIPTION

BLATT PC CENTER - BIKE SHOP RAMP
1300 Wheat Street
Columbia, SC 29208
Project No. CP00424897

SITE LAYOUT PLAN
PROJECT NO. 2014-001
DATE 07/15/14
SCALE C2.0

GRADING AND DRAINAGE PLAN


1300 Wheel Street
 Columbia, SC 29208
 Project No. C09024897

NO.	DATE	DESCRIPTION

BLATT PE CENTER - BIKE SHOP
 RAMP




GARVIN DESIGN GROUP
 1309 Littlefield Street
 P.O. Box 18
 Columbia, SC 29222




LEGEND

NEW	EXISTING	DESCRIPTION
N/A	BENCHMARK/CONTROL POINT	
N/A	PROPERTY LINE/RIGHT OF WAY	
N/A	BUILDING	
N/A	TREE	
N/A	CONTOUR	
x (829.50)	SPOT ELEVATION	
	FIRE HYDRANT	
N/A	LIGHT POLE	
N/A	WATER VALVE	
N/A	WATER METER	
N/A	WATER MAIN/SERVICE	
N/A	STORM DRAIN LINE W/STRUCTURE	
N/A	SANITARY SEWER LINE W/MANHOLE	
N/A	SANITARY SEWER CLEANOUT	
N/A	CHAIN LINK FENCE	
①	KEY NOTE REFERENCE	

GRADING NOTES:
 1. ALL EXISTING AND PROPOSED GRADES SHALL BE SHOWN ON THIS PLAN.
 2. ALL EXISTING AND PROPOSED GRADES SHALL BE SHOWN ON THIS PLAN.
 3. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 4. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 5. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 6. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 7. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 8. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 9. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 10. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 11. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 12. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 13. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 14. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.
 15. CONSTRUCTION SHALL VERIFY ALL FIELD CONDITIONS PRIOR TO BEGINNING WORK.

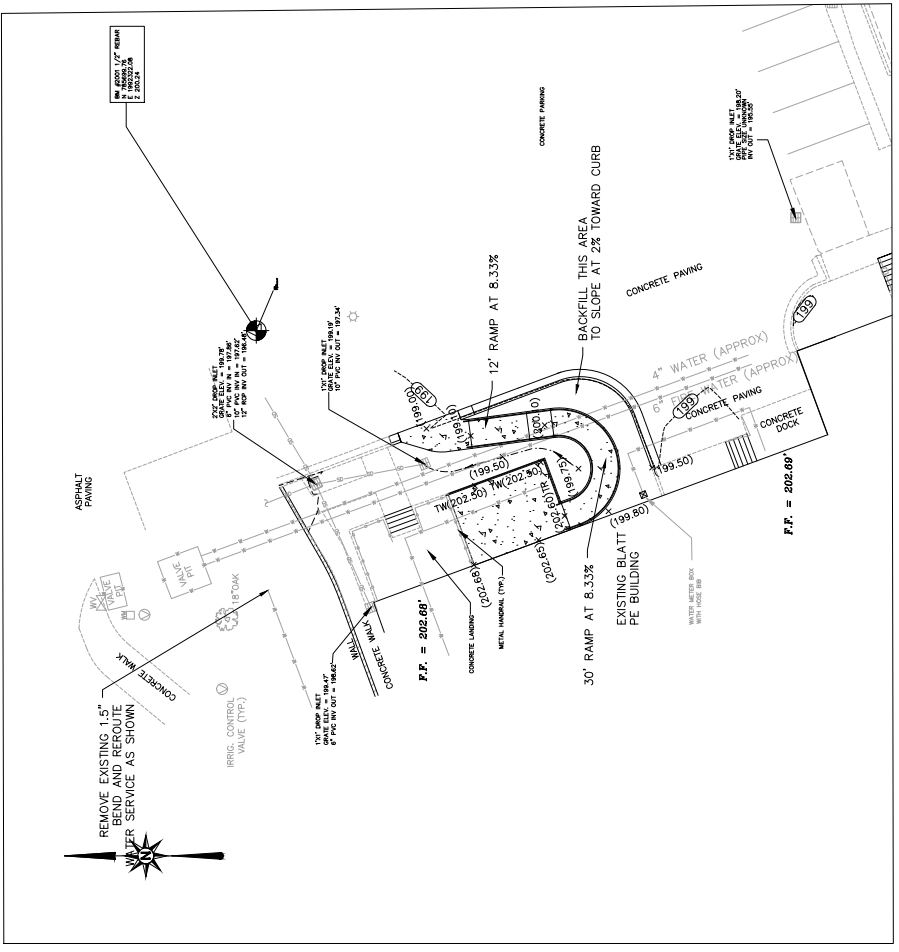



Specifications

The proposed Silt Fence Filter designed to meet the requirements of the following specifications:



1. The Silt Fence shall be constructed of a heavy-duty woven polypropylene fabric with a minimum opening of 1/2 inch.

2. The Silt Fence shall be supported by a trench 6 inches deep and 12 inches wide.





3. The Silt Fence shall be installed on a compacted subgrade.

4. The Silt Fence shall be installed in a line with a maximum spacing of 50 feet between adjacent fences.

5. The Silt Fence shall be installed in a line with a maximum spacing of 50 feet between adjacent fences.







PROPOSED	DESCRIPTION
[Symbol]	SILT FENCE
[Symbol]	CONTOUR
[Symbol]	STORM DRAIN PIPE
[Symbol]	INLET PROTECTION
[Symbol]	LIMITS OF DISTURBANCE (SHADED)
[Symbol]	TEMPORARY CHAIN LINK FENCE








CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MARKED BY YELLOW FLAGGING AND MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.








CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.








CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.








CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.







CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.






CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.



CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.



CONCRETE WASHOUT AND DISPOSAL PROCEDURES:

CONCRETE WASHOUT AREAS MUST BE LOCATED ON THE SITE AND MUST BE CLEARLY MARKED BY YELLOW FLAGGING. THE WASHOUT AREAS MUST BE LOCATED AWAY FROM SURFACE WATER AND AREAS THAT ARE USED AS WALKWAYS. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES. THE WASHOUT AREAS MUST BE MAINTAINED AND KEPT CLEAR AT ALL TIMES.

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

SEDMIMENT AND EROSION CONTROL PLAN

PROJECT NO. 202-897

DATE: 07/27/20

SCALE: AS SHOWN

1300 Wheat Street
Columbia, SC 29208
Project No. CPO042497

PROFESSOR	DATE
ARCHITECT	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE

1300 Wheat Street	DATE
Columbia, SC 29208	DATE
Project No. CP00424897	DATE
RAMP	DATE
BLATT PE CENTER - BIKE SHOP	DATE
PROFESSOR	DATE
ARCHITECT	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE

PROFESSOR	DATE
ARCHITECT	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE

PROFESSOR	DATE
ARCHITECT	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE

PROFESSOR	DATE
ARCHITECT	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE
MECHANICAL	DATE
ELECTRICAL	DATE
PLUMBING	DATE

LANDSCAPE PLAN

L1.0

KEY NOTES

- NEW 2" THICK HARDWOOD MULCH
- NEW BERMUDA SOD (TFWAY 419)
- EXISTING IRRIGATION MAINLINE STUB-UP. ADD 1 VALVE FOR DRIP COVERAGE OF TREE AND SHRUBS AND 1 VALVE FOR SPRAY HEAD COVERAGE OF TREE AND SHRUBS. ALL VALVES SHALL BE XERI-BUG EMITTERS. SPRAY HEADS TO BE 1800 SERIES BY RAINBIRD. PROVIDE "TBOS" BATTERY-OPERATED CONTROLLER FOR NEW VALVES.


LANDSCAPE LEGEND

PROPOSED SOD

PROPOSED SHRUB

PROPOSED TREE

NOTES:
1. CONTRACTOR TO REPAIR ANY SOD AREAS DAMAGED WITH NEW AS REQUIRED
2. HARDWOOD MULCH TO BE 2" THICK

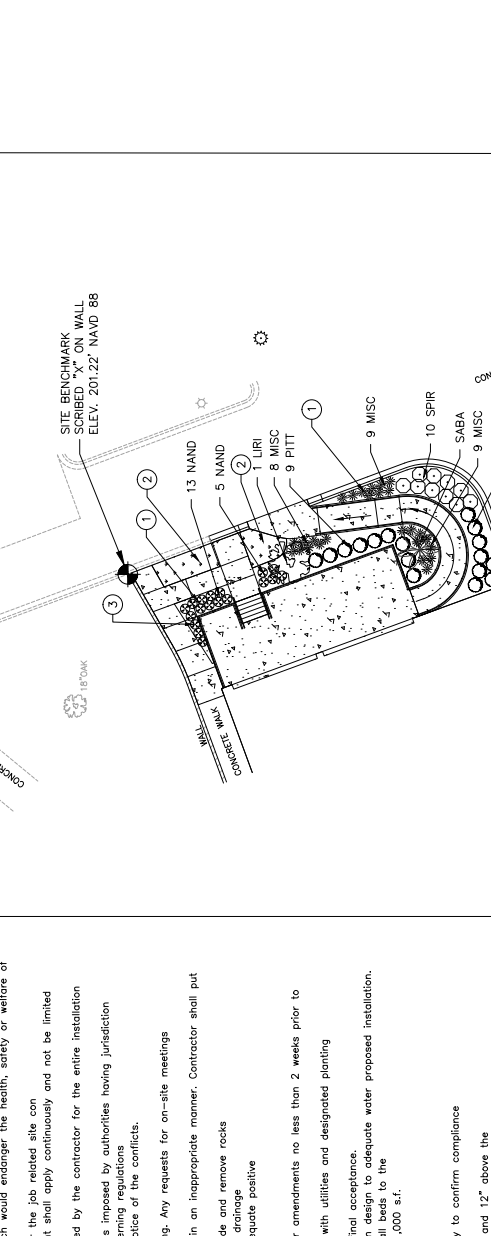


LANDSCAPE SPECIFICATIONS

- The term contractor shall refer to the landscape contractor in the landscape specifications.
- The contractor shall notify the architect if existing site conditions are found to be different than shown on the landscape plan. The contractor shall keep a copy of the landscape plan and specifications on the site at all times while work is in progress. Request clarification from architect if any conflicts occur between plans, notes and specifications.
- All plants shall conform to the American Standard for Nursery Stock, latest edition, unless otherwise noted. Plants shall be free from disease and pests and shall have normal root systems. Plants shall be transported with a covering to avoid wind damage. Plants not found to be acceptable shall be removed from site and replaced at contractor's expense.
- All plants shall be warranted against death or unhealthy condition for a period of one (1) year from date of final acceptance of the landscape installation. Theft of plants, vandalism or lack of reasonable care are excluded from this warranty. Owner to provide adequate watering. To exclude a plant from this warranty due to lack of reasonable care, such as lack of adequate watering or abuse, the contractor must notify the owner/owner representative in writing prior to death of plant.
- Landscape work includes but is not limited to grubbing out weeds, soil preparation, tilling, planting, mulching, weed control and clean-up.
- No part of this work shall be performed or installed in any manner or location which would endanger the health, safety or welfare of the public or any person.
- The contractor shall be responsible for the design of the landscape plan and shall assume sole and complete responsibility for the job related site on landscape installation, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal business hours.
- During installation all on-site plant material must be watered and all work maintained by the contractor for the entire installation period.
- The contractor shall comply with all applicable rules, regulations, laws and ordinances imposed by authorities having jurisdiction over the project site. If any of the plans or specifications are in conflict with the governing regulations then the contractor shall notify the architect immediately in writing. Any requests for on-site meetings must be scheduled with a minimum of 48 hours notice to architect.
- The contractor shall be responsible for obtaining all necessary permits and shall obtain all necessary erosion control permits to contain soil on-site.
- Grades at start of landscape installation shall be +/- 0.1' finished grade. Fine grade and remove rocks 2" diameter or larger. Eliminate depressions that would hold water. Inform architect of drainage problems prior to installation starting. All grades shall slope away from building for adequate positive drainage. Final grade shall be made smooth and even by contractor.
- Remove all existing sod and weeds in proposed plant beds prior to installation.
- Contractor shall provide full adequate agronomic soil test with recommendations for amendments no less than 2 weeks prior to installation. A copy shall be sent to the architect. Take random samplings across site.
- Call to locate utilities prior to digging. Contact architect if there are any conflicts with utilities and designated planting areas.
- Coordinate with Owner where existing irrigation can be pulled from end and include irrigation design to adequate water proposed installation.
- All planting areas shall receive the following soil preparation prior to planting. Till all beds to the depth of 6". Incorporate the following soil amendments. Quantities are minimums per 1,000 s.f.
 - 3 cubic yards of mushroom compost
 - 15 lbs. of agricultural gypsum
 - 25 lbs. of 16-4-8 100% slow release fertilizer
- Burden of proof of soil amendment shall rest on contractor. Soil tests if necessary to confirm compliance with soil amendment shall be completed at expense of contractor.
- Tree calipers shall be measured 6" above the rootball for trees 4" caliper or less and 12" above the rootball for trees in excess of 4" caliper.
- Contractor shall be responsible for ensuring that the rootball is broken or loose.
- Trees shall be planted no closer than 4" from all hardscaping.
- Trees shall not be planted any closer than 4" from utility lines. Relocate slightly if necessary.
- Rootball for containerized plants shall hold all soil from pot when removed from pot, but not be rootbound.
- Planting hole shall be made 2 times the width of the rootball. Set plant with rootball to match previous grade. Set plant in center of hole, plumb and with best side out towards highest visibility. Backfill in a manner that avoids air pockets. Backfill to be 2 parts soil:1 part mushroom compost.
- Set B&B plants in hole to match rootball to match previous grade, backfill 2/3, remove top portion of burlap complete backfill. Backfill to be 3 parts soil from pit: 1 part mushroom compost.
- Apply pre-emergence as per manufacturers recommendations. Check label for plant compatibility. All chemicals to be kept in their original container and shall be handled and applied in accordance with laws.
- Unadorned hardwood mulch to fill in as shown for a depth of 2 inches. Treat with pre-emergent herbicide prior to mulch installation.
- Contractor shall be responsible for ensuring that the mulch is applied in areas of smaller limbs and grade where scraping.
- Remove all tags from trees to avoid future girdling.
- Deep water all new planting within the first 24 hours of installing. Keep watered as necessary during entire installation period.
- All pruning must have prior written approval by architect.
- Areas not designated as planting beds shall be sodded as per plans. All grass shall be common Bermuda
- All areas to be sodded or seeded shall be disked or tilled to the depth of 6", then fine graded. Remove weeds, stones and debris prior to laying sod. Eliminate any unweeds prior to installation.
- Lay sod with hand tight joints. Lay perpendicular to slope. Roll to assure good contact of roots with soil
- Lightly water immediately after installation.
- Apply a pre-emergent to control weeds as planting bed or sod shall be seeded. Seed for permanent stand of grass.
- Use a 1/2" diameter or greater shall be resodded.
- Base grade 8" diameter or greater shall be resodded.
- Apply a root stimulating fertilizer as per manufacturers recommendations.
- Clean up site daily of all related materials in regards to landscape installation. Keep tools safely placed during daily progress.
- Contractor shall maintain landscape throughout the installation until time of final acceptance.
- Any plants that die or are found to be unacceptable shall be replaced within 6-8 weeks of notification, weather and planting conditions permitting.

ABBREVIATION	BOTANICAL NAME	COMMON NAME	SIZE	QTY
MISC	MISCANTHUS SINENSIS LITTLE GIFTEN	FOUNTAIN GRASS	3 GAL	26
NAND	NANDINA DOMESTICA HARBOR DWARF	NANDINA	3 GAL	18
SABA	SABAL PALMETTO	FLORIDANA PALMETTO	12" HT.	1
SPIR	SPIREA JAPONICA LITTLE PRINCESS	SPIREA	3 GAL	19


PLANT LIST

NO.	REVISION	DATE

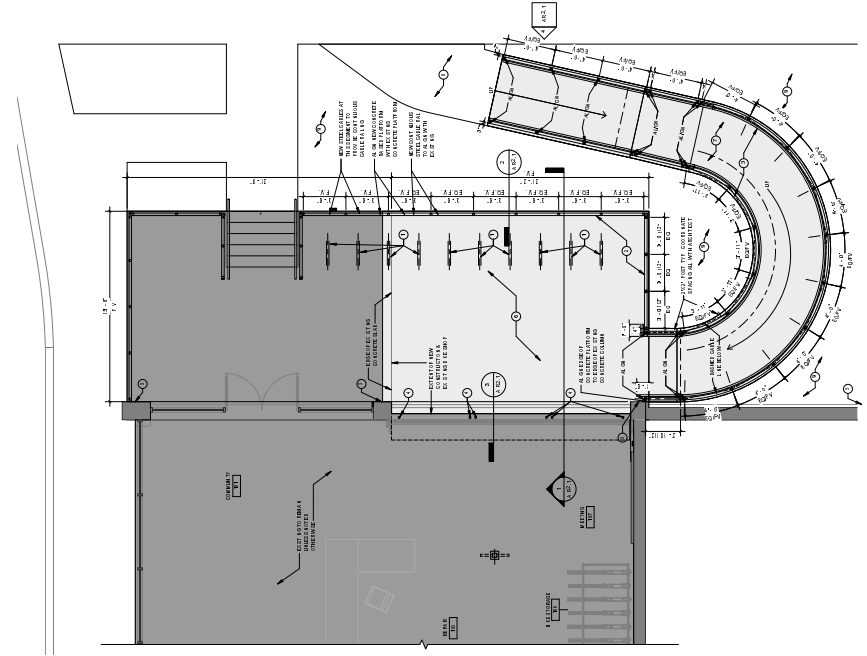

1. FIRST FLOOR PLAN
 1/21/2017
 WASHINGTON, DC

- GENERAL NOTES - FIRST FLOOR PLAN**
- SEE SITE PLAN FOR LOCATION OF THIS FLOOR PLAN.
 - ALL DIMENSIONS UNLESS OTHERWISE NOTED ARE IN FEET AND INCHES.
 - ALL WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL DOORS ARE 36" WIDE UNLESS OTHERWISE NOTED.
 - ALL WINDOWS ARE 48" WIDE UNLESS OTHERWISE NOTED.
 - ALL FLOORS ARE 4" THICK UNLESS OTHERWISE NOTED.
 - ALL CEILING ARE 8' HIGH UNLESS OTHERWISE NOTED.
 - ALL ROOF ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL FOUNDATION ARE 18" THICK UNLESS OTHERWISE NOTED.
 - ALL EXTERIOR WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL INTERIOR WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL PARTITIONS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL STAIRS ARE 36" WIDE UNLESS OTHERWISE NOTED.
 - ALL ELEVATIONS ARE TO FINISH UNLESS OTHERWISE NOTED.
 - ALL FINISHES ARE TO BE DETERMINED BY THE ARCHITECT.
 - ALL MATERIALS ARE TO BE APPROVED BY THE ARCHITECT.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.

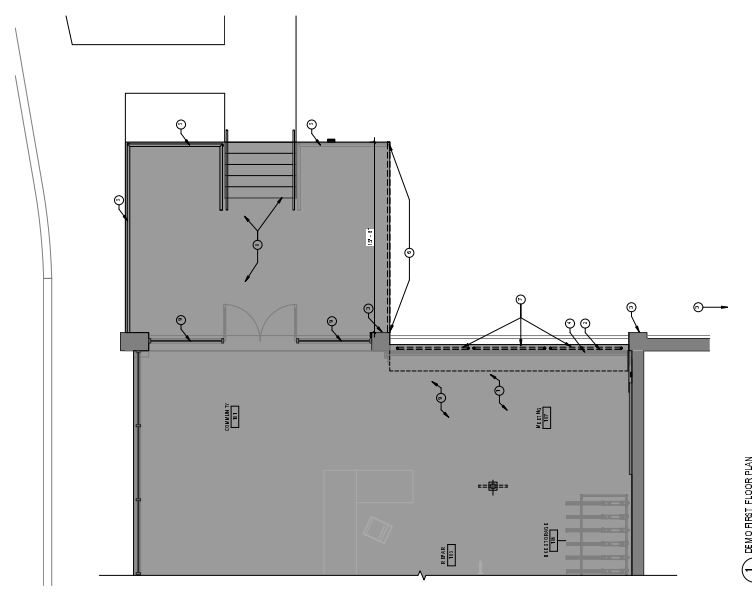

2. DEMO FIRST FLOOR PLAN
 1/21/2017
 WASHINGTON, DC




- GENERAL NOTES - DEMO FIRST FLOOR PLAN**
- ALL DIMENSIONS UNLESS OTHERWISE NOTED ARE IN FEET AND INCHES.
 - ALL WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL DOORS ARE 36" WIDE UNLESS OTHERWISE NOTED.
 - ALL WINDOWS ARE 48" WIDE UNLESS OTHERWISE NOTED.
 - ALL FLOORS ARE 4" THICK UNLESS OTHERWISE NOTED.
 - ALL CEILING ARE 8' HIGH UNLESS OTHERWISE NOTED.
 - ALL ROOF ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL FOUNDATION ARE 18" THICK UNLESS OTHERWISE NOTED.
 - ALL EXTERIOR WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL INTERIOR WALLS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL PARTITIONS ARE 12" THICK UNLESS OTHERWISE NOTED.
 - ALL STAIRS ARE 36" WIDE UNLESS OTHERWISE NOTED.
 - ALL ELEVATIONS ARE TO FINISH UNLESS OTHERWISE NOTED.
 - ALL FINISHES ARE TO BE DETERMINED BY THE ARCHITECT.
 - ALL MATERIALS ARE TO BE APPROVED BY THE ARCHITECT.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE NATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.
 - ALL WORK IS TO BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND SPECIFICATIONS.

NO.	REVISION	DATE

PROJECT TITLE
BLATT PE CENTER - BIKE SHOP RAMP


1300 Main Street
 Columbia, SC 29208
 Project No. CP0042697

GARVIN DESIGN GROUP
 1709 Lakeland Street
 P.O. Box 18
 Columbia, SC 29202

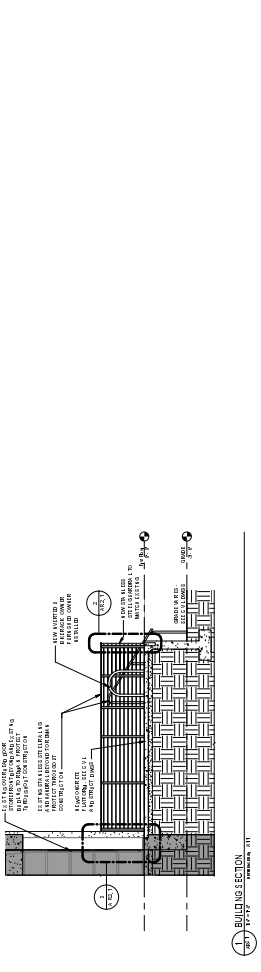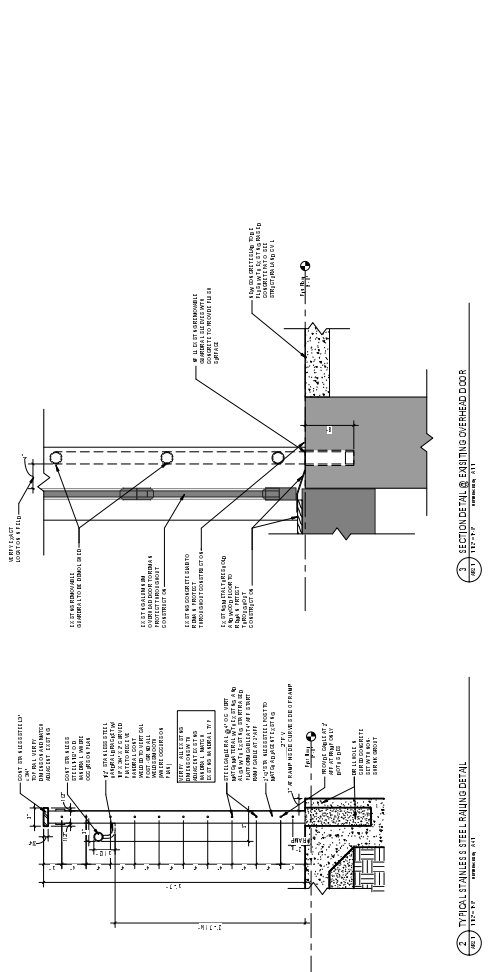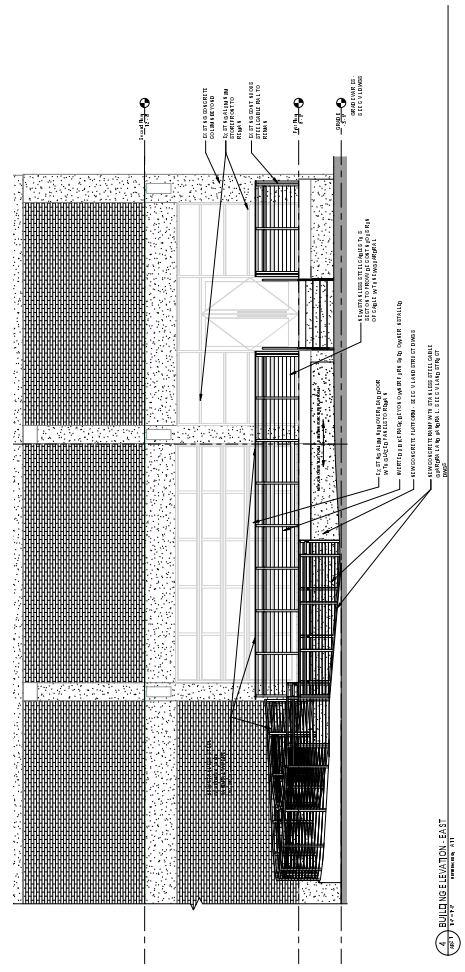

NO.	DATE	REVISION

NO.	DATE	REVISION




KEY NOTES


1. ALL ELECTRICAL WORK SHALL BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) AND ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

ELECTRICAL SYMBOL LEGEND

SYMBOL DESCRIPTION	SYMBOL
JUNCTION BOX (CALL OUT)	⊕
SECURITY GEAR RACK	⊕
CEILING LIGHT (WALL MOUNTED)	⊕
RECESSED CEILING LIGHT	⊕
RECESSED WALL MOUNTED LIGHT	⊕

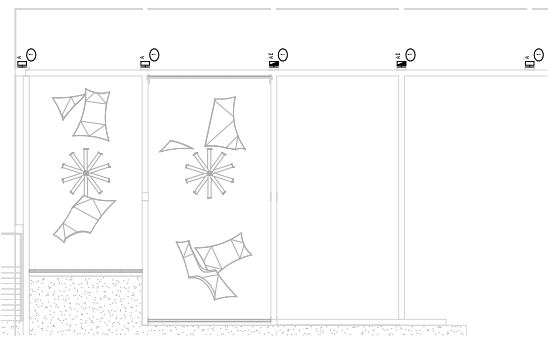

2. SECOND FLOOR ELECTRICAL RENOVATION PLAN
 SCALE: 1/8" = 1'-0"

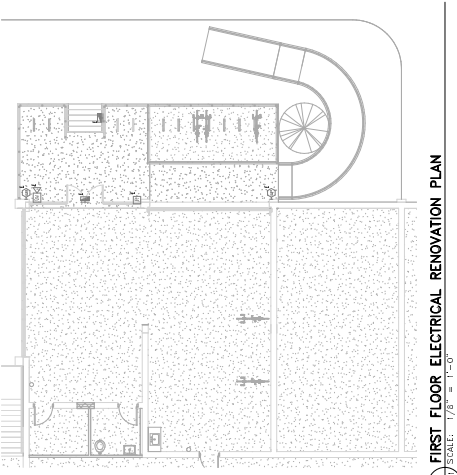

1. FIRST FLOOR ELECTRICAL RENOVATION PLAN
 SCALE: 1/8" = 1'-0"

LIGHT FIXTURE SCHEDULE

SYMBOL	TYPE	DESCRIPTION	MANUFACTURER	CAT. #	NO.	LAMP TYPE	LOAD	VOLTS	MOUNTING	REMARKS	NOTES
⊕	1	RECESSED WALL MOUNTED LIGHT	OSRAM	1200/270V/08 P. SCL	28	270V	28	277V	WALL		
⊕	2	RECESSED CEILING LIGHT	OSRAM	1200/270V/08 P. SCL	28	270V	28	277V	WALL		

LIGHT FIXTURE SCHEDULE NOTES


- UNLESS NOTED IN SCHEDULE REPRESENT DISCREETLY DOWNWARD OF FIXTURES.
- FIXTURES SHALL BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) AND ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

DEMOLITION/RENOVATION NOTATION

ALL EXISTING ELECTRICAL WORK SHALL BE DEMOLISHED AND REMOVED FROM THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

ELECTRICAL DRAWING INDEX

SHEET NO.	SHEET TITLE
1111	BIKE RAMP ELECTRICAL PLANS

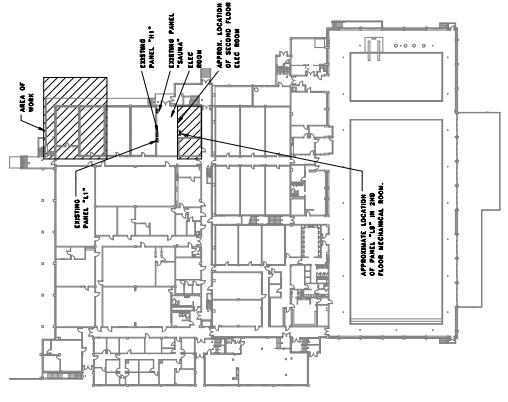

4. KEYPLAN
 SCALE: NOT TO SCALE