

USC Aiken Pedestrian Safety Improvements  
Addendum No.2 Items – 3/2/2012

The following Addendum items and clarifications shall be incorporated into and made a part of the bidding and contract documents:

USC Aiken Pedestrian Safety Improvements  
Project No. H29-I332

**Item #1-** Clarification-Bidding contractors shall include a lump sum fee of \$9,275.39 for the two (2) emergency call boxes in the base bid as indicated on the attached price quote from Ramtel. Bidding contractors shall include a lump sum fee of \$4,637.70 in the pricing of Alternate No.1 for the additional emergency call box.

**Item #2-** Clarification- Detail 10/C201-Truncated dome brick pavers no longer in project scope. Truncated dome bricks to be replaced with cast in place truncated dome detectable warning system by ADA Solutions, Inc.

Color: Federal Yellow

Only cast in place installation will be acceptable.

**Item #3-** Clarification-Pull box for telecommunications conduit referenced in Addendum No.1 SK1/C101 contains 4-4" flexible conduit entering and exiting from the narrow ends of the box. The conduits are buried to a depth of 30" and box has drainage stone in bottom.

**Item #4-**Any excess cut material remaining after grading activities shall be legally disposed of by contractor off-site.

**Item#5-**For Emergency Call boxes, eliminate stub-out conduits for communications.


Install 3/4" conduit from the electrical room in the basement of the Library (see attached E102 Sketch for location) and route a Category 3 four-pair UTP, wet rated, cable to a Quazite A47101512A (or equal) handhole next to the Alternate No. 1 call box location shown on E102 (for future connection to said call box). Provide six feet of slack coiled and unterminated inside basement of library electrical room. In handhole, splice the cable to two additional category 3 four-pair UTP, wet-rated, cables to be routed to the other two call boxes shown on E101 and E103. Provide same length of slack in handhole for all three cables to allow for connecting to future (Alternate No. 1) call box. All cables shall be in 3/4" Conduit and, where possible, routed alongside power conduit in the same trench. Provide TEE connection in raceway at Pacer Downs roadway. For crossing Pacer Downs, push and bore under the road.

Note: Price for work for ALTERNATE NO. 1 should take into account a credit for NOT installing a separate handhole, but instead pulling communications cable directly to call box shown on E102 with no cable slack in call box.

Attachments:

-Ramtel price quote

-E102 Sketch

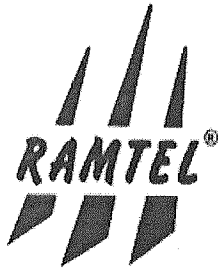

115 Railroad Ave.  
Johnston, RI 02919

2/27/12 ©

Bob Weisner  
bobw@usca.edu  
803-641-3522

Ref: Price Quote-University of South Carolina Aiken

*Prices quoted are discounted (refer terms)  
If Paying With Credit Card, there will Be An Additional 3% Convenience Fee Charge  
Added To Order*

**Stainless Steel Columns**

**Qty. 2**

Column includes 2 built in High Powered LED Strobe Lights, and Light over phone panel.

PLC-8 A 11" square with radius corners 3,674.00 Each  
Powder Coated in Neutral Gray with White "Emergency" Lettering

Built in Heater 82.00 Each  
Anchor Bolts and Template (500-1179) 39.40 Per Set of 4

**One Button Phone Model**

**Qty. 2**

RR733 (Installed in columns) 444.00 Each  
With 2" Button  
Custom Silk Screened Phone Panels 2 colors. No Charge  
Surge Arrestor (800-1018) 33.75 Each

*Back Boxes are included with phones which protects electronics  
From moisture and condensation. No Charge*

**\*\* Shipping charges are estimated, as of this day. \*\***

**Pricing adjustment will be updated at time of shipment.**

**If notification of change is required, it must be requested at time of order.**

**NOTE: Additional charges from Carrier, due to delivery to "residential  
address" or to "Job Site" is the responsibility of customer.**

**Shipping Charges as of Today's Date to Zip Code 29801**

Columns/Phones (Via YRC Freight) (qty 2) 563.09 Total  
Shipping Carton Column 83.00 Each

**Total Product: \$8,546.30**

**Total Shipping charges: \$563.09**

**Total Shipping cartons: \$166.00**

**Total Shipping & Handling: \$729.09**

**Grand Total For This Order: \$9,275.39**

**Terms: Net 30 FOB Johnston, RI**

**Warranty:** Two years Phones: One Year on parts & labor based  
on normal use and wear. One year on Parts Only.  
Other products: One year on parts & labor based on  
normal use and wear


**Eleanor A. Kelley**

**Dir Marketing & Product Development**

**Quote in effect 30 Days**

401.231.3340 Ext 222

[eakelley@ramtel.com](mailto:eakelley@ramtel.com)

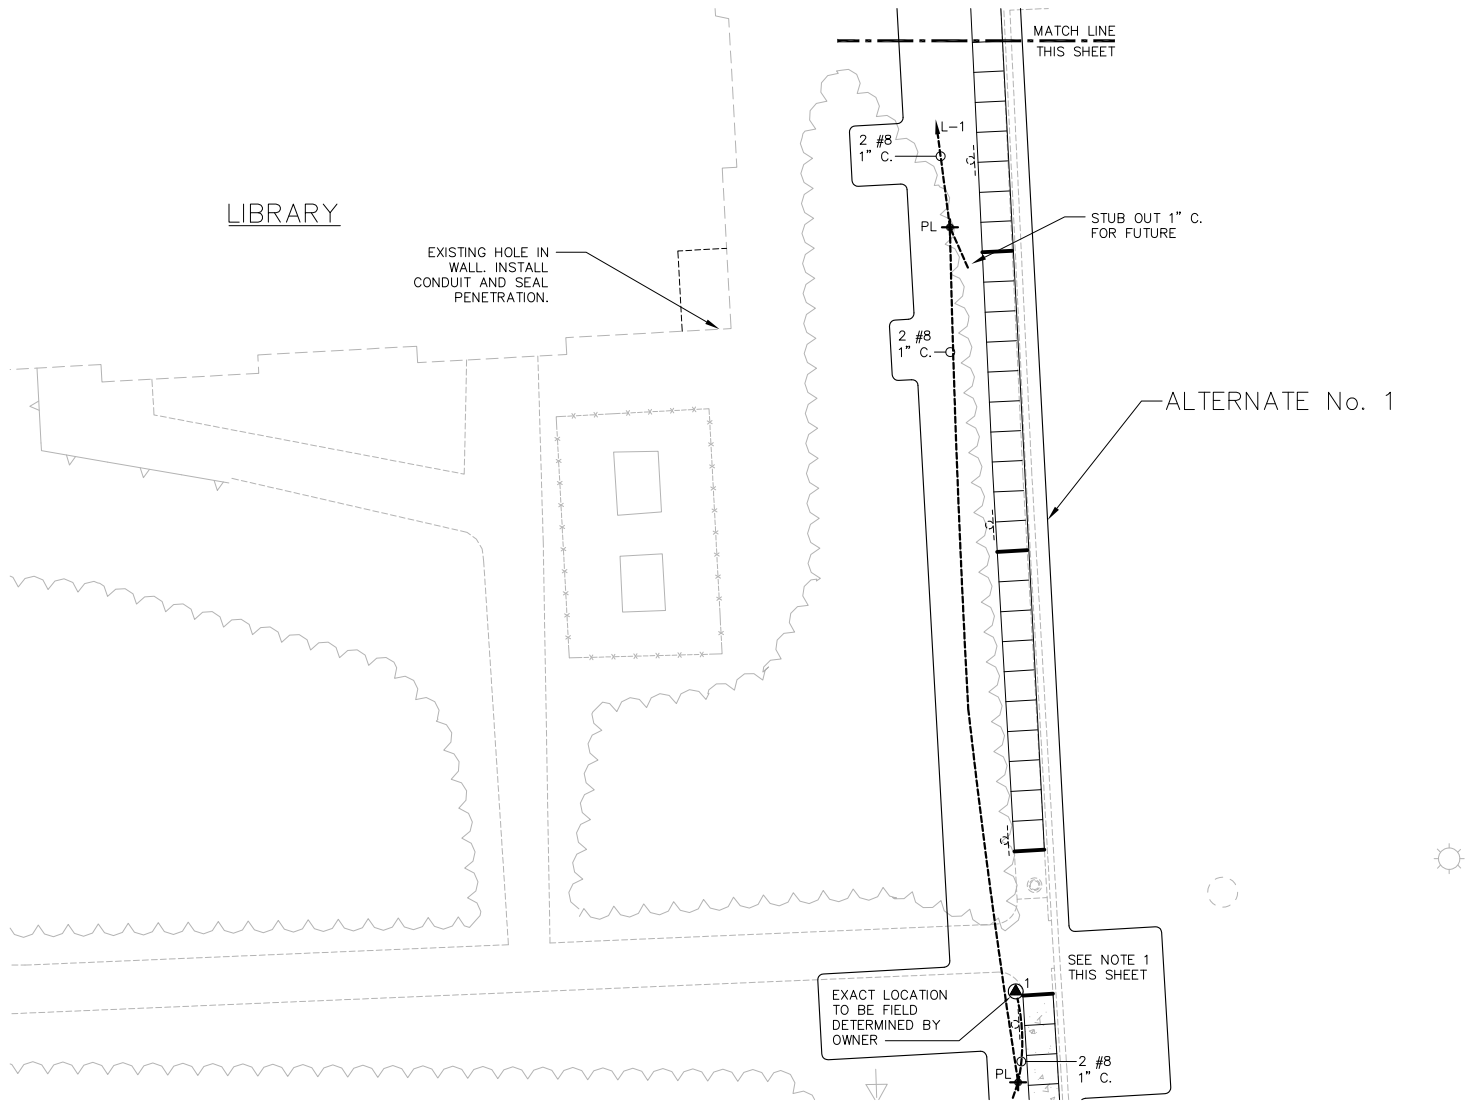

E102 PARTIAL PLAN  
3/1/2012