

Contract Documents and Specifications

For

**Cabinets and Vanities 100 Level – Williams-Brice Stadium 100 Level and Suite 207
Renovations**

For

University of South Carolina

Project # H27-Z332-K

June 5, 2017

TABLE OF CONTENTS

Project Number: H27-Z332-K

Project Name: Cabinets and Vanities 100 Level – Williams-Brice Stadium 100 Level and Suite 207 Renovations

Section 1	Number of Pages
Table of Contents	1
Invitation for Minor Construction Quotes, SE-311, 2016 Edition	1
Standard Bid Quote, SE-331, 2016 Edition	1
USC Supplemental General Conditions for Construction Projects	5
Contractor's One-Year Guarantee	1
Section 2 – Technical Specifications:	
General Notes	1
064113 Wood-Veneer-Faced Architectural Cabinets	8
123661 Simulated Stone Countertops	3

SE-311

INVITATION FOR MINOR CONSTRUCTION QUOTES

PROJECT NAME: Cabinets and Vanities, 100 Level; Williams-Brice Stadium 100 Level and Suite 207 RenovationsPROJECT NUMBER: H27-Z332-KPROJECT LOCATION: Williams-Brice StadiumBID SECURITY REQUIRED? Yes No PERFORMANCE BOND REQUIRED? Yes No PAYMENT BOND REQUIRED? Yes No

CONSTRUCTION COST RANGE: \$ < \$ 50,000.

DESCRIPTION OF PROJECT: Provide and install cabinets and vanities for 100 level of Williams Brice Stadium. Duration of work is 60 days with intended completion date of August 25, 2017. The only official site visit will be offered immediately after the pre-bid meeting. Small and minority business participation is highly encouraged.

BIDDING DOCUMENTS/PLANS MAY BE OBTAINED FROM: purchasing.sc.edu; Facilities/Construction Solicitations/AwardsPLAN DEPOSIT AMOUNT: \$ \$0.00 IS DEPOSIT REFUNDABLE Yes No N/A

Bidders must obtain Bidding Documents/Plans from the above listed source(s) to be listed as an official plan holder. Only those Bidding Documents/Plans obtained from the above listed source(s) are official. Bidders rely on copies of Bidding Documents/Plans obtained from any other source at their own risk.

IN ADDITION TO THE ABOVE OFFICIAL SOURCE(S), BIDDING DOCUMENTS/PLANS ARE ALSO AVAILABLE AT:

N/A

All questions & correspondence concerning this Invitation shall be addressed to the A/E.

A/E NAME: Watson-Tate-Savory ArchitectsA/E CONTACT: Gene BellA/E ADDRESS: Street/PO Box: 1316 Washington Street, Suite 100City: ColaState: SCZIP: 29201-EMAIL: gbell@watsonatesavory.comTELEPHONE: 803-799-5181FAX: 803-799-5757AGENCY: University of South CarolinaAGENCY PROJECT COORDINATOR: Juaquana BrookinsADDRESS: Street/PO Box: 743 Greene StCity: ColaState: SCZIP: 29208-EMAIL: jbrookin@fmc.sc.eduTELEPHONE: 803-777-3596FAX: 803-777-7334PRE-QUOTE CONFERENCE: Yes No MANDATORY ATTENDANCE: Yes No PRE-QUOTE DATE: 6/15/2017TIME: 10:00amPLACE: 743 Greene St., Cola., SC 29208, Conf rm 53QUOTE CLOSING DATE: 6/22/2017TIME: 2:00pmPLACE: 743 Greene St., Cola., SC 29208, Conf rm 53

QUOTE DELIVERY ADDRESSES:

HAND-DELIVERY:

Attn: Juaquana Brookins743 Greene StColumbia, SC 29208

MAIL SERVICE:

Attn: Juaquana Brookins743 Greene StColumbia, SC 29208

APPROVED BY: _____

(Agency Project Coordinator)

DATE: _____

**SE-331
QUOTE FORM**

Quotes shall be submitted only on SE-331.

QUOTE SUBMITTED BY: _____
(Offeror's Name)

QUOTE SUBMITTED TO: University of South Carolina
(Owner's Name)

FOR: PROJECT NAME: Cabinets and Vanities: Williams-Brice Stadium 100 Level and Suite 207 Renovations

PROJECT NUMBER: H27-Z332-K

OFFER

- In response to the Invitation for Minor Construction Quotes, and in compliance with the Instructions to Bidders for the above-named Project, the undersigned **OFFEROR** proposes and agrees, if this Quote is accepted, to enter into a Contract with the Owner in the form included in the Solicitation Documents, and to perform all Work as specified or indicated in the Solicitation Documents, for the prices and within the time frames indicated in the Solicitation and in accordance with the other terms and conditions stated.
- Pursuant to Section 11-35-3030(1) of the SC Code of Laws, as amended, **OFFEROR** has submitted Bid Security as follows in the amount and form required by the Solicitation Documents:

Bid Bond with Power of Attorney Electronic Bid Bond Cashier's Check

(Bidder check one)

- OFFEROR** acknowledges the receipt of the following Addenda to the Solicitation documents and has incorporated the effects of said Addenda into its Quote *(Bidder, check only boxes that apply):*

ADDENDA: #1 #2 #3 #4 #5

- OFFEROR** agrees that this Quote, including all bid alternates, if any, may not be revoked or withdrawn after the opening of quotes, and shall remain open for acceptance for a period of 60 Days following the Quote Date, or for such longer period of time that **OFFEROR** may agree to in writing upon request of the Owner.
- OFFEROR** agrees that from the compensation to be paid, the Owner shall retain as Liquidated Damages the amount of \$ 150.00 for each calendar day the actual construction time required to achieve Substantial Completion exceeds the specified or adjusted Contract Time for Substantial Completion, as provided in the Contract Documents.
- OFFEROR** herewith submits its offer to provide all labor, materials, equipment, tools of trades and labor, accessories, appliances, warranties and guarantees, and to pay all royalties, fee, permits, licenses and applicable taxes necessary to complete the following items of construction work:

6.1 BASE QUOTE \$ _____
(enter BASE QUOTE in figures only)

6.1.1 ALTERNATE NO. 1 \$ _____ **to be ADDED / DEDUCTED from BASE QUOTE.**
(circle one)

6.1.2 ALTERNATE NO. 2 \$ _____ **to be ADDED / DEDUCTED from BASE QUOTE.**
(circle one)

SC Contractor's License Number: _____
Classification(s) & Limits: _____
Address: _____

Telephone/Fax: _____
E-mail: _____

This Quote is hereby submitted on behalf of the Offeror named above.

BY: _____
(Signature of Offeror's Representative)

(Print or Type Name of Offeror's Representative)

TITLE: _____

USC SUPPLEMENTAL GENERAL CONDITIONS
FOR CONSTRUCTION PROJECTS

WORK AREAS

1. The Contractor shall maintain the job site in a safe manner at all times. This includes (but is not limited to) the provision and/or maintenance of lighting, fencing, barricades around obstructions, and safety and directional signage.
2. Contractor's employees shall take all reasonable means not to interrupt the flow of student traffic in building corridors, lobbies, stairs and exterior walks. All necessary and reasonable safety precautions shall be taken to prevent injury to building occupants while transporting materials and equipment through the work area. Providing safe, accessible, plywood-shielded pedestrian ways around construction may be required if a suitable alternative route is not available.
3. At the beginning of the project, the USC Project Manager will establish the Contractor's lay-down area. This area will also be used for the Contractor's work vehicles. The lay-down area will be clearly identified to the contractor by the Project Manager, with a sketch or drawing provided to USC Parking Services. In turn, Parking Services will mark off this area with a sign containing the project name, Project Manager's name, Contractor name and contact number, and end date. Where this area is subject to foot traffic, protective barriers will be provided as specified by the Project Manager. The area will be maintained in a neat and orderly fashion.
4. Work vehicles parked in the lay down area (or designated parking areas) will be clearly marked and display a USC-furnished placard for identification. No personal vehicles will be allowed in this area, or in any areas surrounding the construction site. Personal vehicles must be parked in the perimeter parking lots or garages. Temporary parking permits can be obtained at the Contractor's expense at the USC Parking Office located in the Pendleton Street parking garage. Refer to the CAMPUS VEHICLE EXPECTATIONS (below) for additional information.
5. Contractor is responsible for removal of all debris from the site, and is required to provide the necessary dumpsters which will be emptied on a regular basis. Construction waste must not be placed in University dumpsters. The construction site must be thoroughly cleaned with all trash picked up and properly disposed of on a daily basis and the site must be left in a safe and sanitary condition each day. The University will inspect job sites regularly and will fine any contractor found to be in violation of this requirement an amount of up to \$1,000 per violation.
6. Where it is necessary to jump curbs, dimensional lumber and plywood must be built up to appropriate curb elevation to protect curbs from damage. Contractor will be responsible for any project related damage.
7. The Contractor shall be responsible for erosion and sediment control measures where ground disturbances are made.

PROJECT FENCING

8. All construction projects with exterior impacts shall have construction fencing at the perimeter. Fencing shall be 6' chain link with black or green privacy fabric (80-90% blockage). For fence panels with footed stands, sandbag weights shall be placed on the inside of the fence. Ripped sandbags shall be replaced immediately.
9. For projects with long fencing runs and/or high profile locations, decorative USC banners shall be used on top of privacy fabric; banners should be used at a ratio of one banner for every five fence

panels. USC Project Manager will make arrangements for banner delivery for Contractor to hang.

10. The use of plastic safety fencing is discouraged and shall only be used on a temporary basis (less than four weeks) where absolutely necessary. Safety fencing shall be a neon yellow-green, high-visibility fencing equal to 'Kryptonight' by Tenax. Safety fencing shall be erected and maintained in a neat and orderly fashion throughout the project.
11. Vehicles and all other equipment shall be contained within a fenced area if they are on site for more than 3 consecutive calendar days.

BEHAVIOR

12. Fraternalization between Contractor's employees and USC students, faculty or staff is strictly prohibited.
13. USC will not tolerate rude, abusive or degrading behavior on the job site. Heckling and cat-calling directed toward students, faculty or staff or any other person on USC property is strictly prohibited. Any contractor whose employees violate this requirement will be assessed a fine of up to \$500 per violation.
14. Contractor's employees must adhere to the University's policy of maintaining a drug-free and tobacco-free campus. Tobacco product trash that is found on the jobsite may result in a \$25/piece fee.

HAZARDOUS MATERIALS & SAFETY COMPLIANCE

15. A USC Permit to Work must be signed prior to any work being performed by the general contractor or sub-contractor(s).
16. The contractor will comply with all regulations set forth by OSHA, EPA and SCDHEC. Contractor must also adhere to USC's internal policies and procedures (available by request). Upon request, the contractor will submit all Safety Programs and Certificates of Insurance to the University for review.
17. Contractor must notify the University immediately upon the discovery of suspect material which may contain asbestos or other such hazardous materials. These materials must not be disturbed until approved by the USC Project Manager.
18. In the event of an OSHA inspection, the Contractor shall immediately call the Facilities Call Center, 803-777-4217, and report that an OSHA inspector is on site. An employee from USC's Safety Unit will arrive to assist in the inspection.

LANDSCAPE & TREE PROTECTION

19. In conjunction with the construction documents, the USC Arborist shall direct methods to minimize damage to campus trees. Tree protection fencing is required to protect existing trees and other landscape features to be affected by a construction project. The location of this fence will be evaluated for each situation with the USC Arborist, Landscape Architect and Project Manager. Tree protection fencing may be required along access routes as well as within the project area itself. Fence locations may have to be reset throughout the course of the project.
20. The tree protection fence shall be 6' high chain link fence with 80-90% privacy screening unless otherwise approved by USC Arborist and/or Landscape Architect. If the tree protection fence is completely within a screened jobsite fence perimeter, privacy fabric is not required. In-ground

fence posts are preferred in most situations for greater protection. If utility or pavement conflicts are present, fence panels in footed stands are acceptable. See attached detail for typical tree protection fencing.

21. No entry, vehicle parking, or materials storage will be allowed inside the tree protection zone. A 4" layer of mulch shall be placed over the tree protection area to maintain moisture in the root zone.
22. Where it is necessary to cross walks, tree root zones (i.e., under canopy) or lawns the following protective measures shall be taken:
 - a. For single loads up to 9,000 lbs., a 3/4" minimum plywood base shall be placed over 4" of mulch.
 - b. For single loads over 9,000 lbs., two layers of 3/4" plywood shall be placed over 4" of mulch.
 - c. Plywood sheets shall be replaced as they deteriorate or delaminate with exposure.
 - d. For projects requiring heavier loads, a construction entry road consisting of 10' X 16' oak logging mats on 12" coarse, chipped, hardwood base. Mulch and logging mats shall be supplemented throughout the project to keep matting structurally functional.
23. Damage to any trees during construction shall be assessed by the USC Arborist, who will stipulate what action will be taken for remediation of damage. The cost of any and all remediation will be assumed by the contractor at no additional cost to the project. Compensation for damages may be assessed up to \$500 per caliper inch of tree (up to 8") and \$500 per inch of diameter at breast height (for trees over 8").
24. Damage to trunks and limbs, as well as disturbance of the root zone under the dripline of tree, including compaction of soil, cutting or filling, or storage of materials, shall qualify as damage and subject to remediation.
25. Any damage to existing pavements or landscaping (including lawn areas and irrigation) will be remediated before final payment is made.

TEMPORARY FACILITIES

26. Contractor will be responsible for providing its own temporary toilet facilities, unless prior arrangements are made with the USC Project Manager.
27. Contractor must provide its own electrical power supply. Water may be available to the extent of existing sources. Any needed or desired taps, connections, or metering devices, shall be at the sole expense of the contractor.
28. Use of USC communications facilities (telephones, computers, etc.) by the Contractor is prohibited, unless prior arrangements are made with the USC Project Manager.

CAMPUS KEYS

29. Contractor must sign a Contractor Key Receipt/Return form before any keys are issued. Keys must be returned immediately upon the completion of the work. The Contractor will bear the cost of any re-keying necessary due to the loss of or failure to return keys.

WELDING


30. A welding (hot work) permit must be issued by the University Fire Marshall before any welding can begin inside a building. The USC Project Manager will coordinate.

PROJECT EVALUATION & CLOSE-OUT

31. For all projects over \$100,000, including IDCs, a Contractor Performance Evaluation (SE 397) will be reviewed with the GC at the beginning of the project and a copy given to the GC. At the end of the project the form will be completed by the USC Project Manager and a Construction Performance rating will be established.
32. Contractor must provide all O&M manuals, as-built drawings, and training of USC personnel on new equipment, controls, etc. prior to Substantial Completion. Final payment will not be made until this is completed.

CAMPUS VEHICLE EXPECTATIONS

33. Personal vehicles must be parked in the perimeter parking lots or garages. Temporary parking permits can be obtained at the Contractor's expense at the USC Parking Office located in the Pendleton Street parking garage.
34. All motorized vehicle traffic on USC walkways and landscape areas must be approved by the USC Project Manager and Parking Division, have a USC parking placard, and be parked within the approved laydown area. Violators may be subject to ticketing, towing and fines.
35. All motorized vehicles that leak or drip liquids are prohibited from traveling or parking on walks or landscaped areas.
36. Drivers of equipment or motor vehicles that damage university hardscape or landscape will be held responsible for damages and restoration expense.
37. All vehicles parked on landscape, hardscape, or in the process of service delivery, must display adequate safety devices, i.e. flashing lights, cones, signage, etc.
38. All drivers of equipment and vehicles shall be respectful of University landscape, equipment, structures, fixtures and signage.
39. All incidents of property damage shall be reported to Parking Services or the Work Management Center.

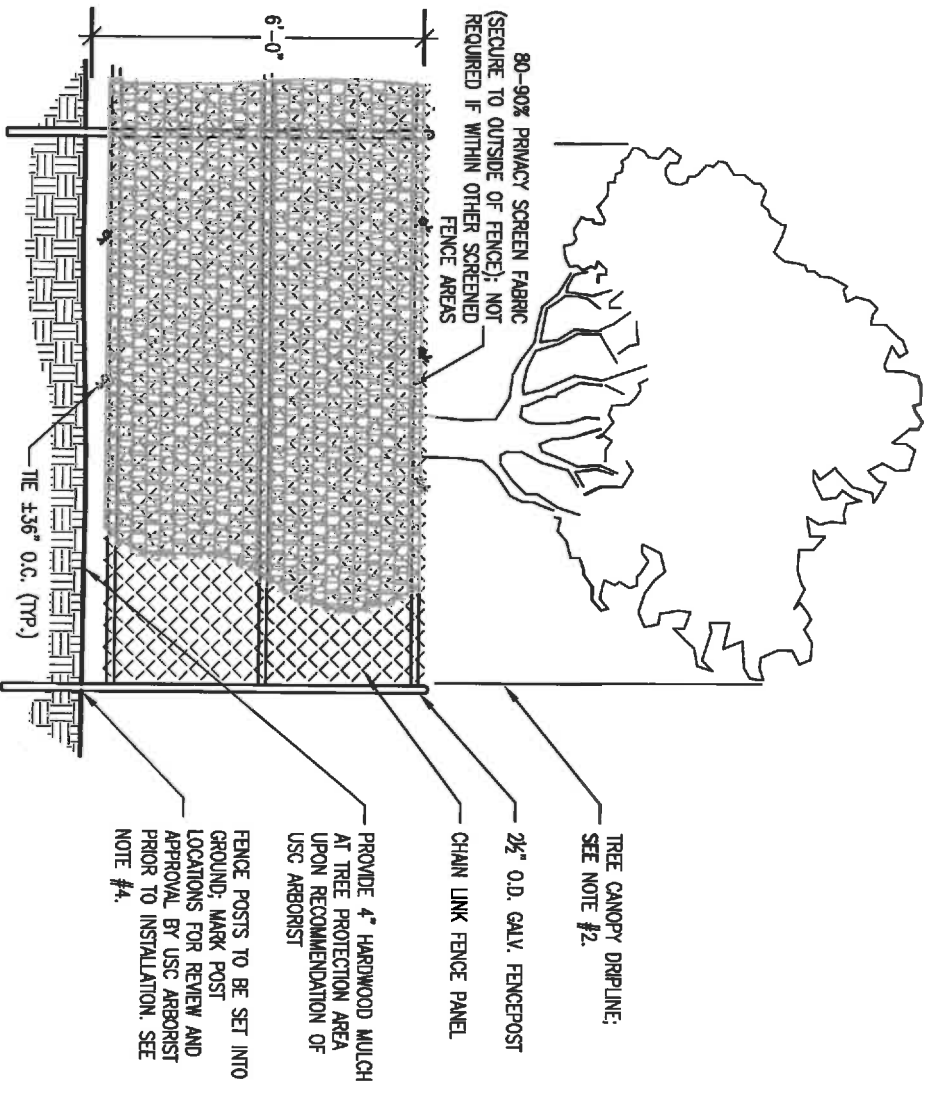

TREE PROTECTION FENCING (IN-GROUND) WITH SCREENING

NOTES:

1. PROVIDE PROTECTION FENCING FOR ALL TREES WITHIN AREA OF DISTURBANCE AND CONSTRUCTION ACCESS.
2. PROTECTION FENCING SHALL BE IN PLACE PRIOR TO BEGINNING CONSTRUCTION.
3. PROTECTION FENCING TO BE PLACED AT THE OUTSIDE OF THE CANOPY DRIPLINE, OR AT A DISTANCE OF ONE FOOT PER ONE INCH OF TREE DIAMETER, MEASURED AT BREAST HEIGHT, WHICHEVER IS LARGER, UNLESS OTHERWISE INDICATED ON LANDSCAPE PLAN OR APPROVED BY UNIVERSITY ARBORIST.
4. IN-GROUND POSTS ARE STANDARD. IF EXISTING ROOTS, UTILITIES OR PAVEMENT PRECLUDE USE OF IN-GROUND POSTS, FOOTED STANDS ARE ACCEPTABLE. SAND BAGS SHALL BE PLACED ON THE INSIDE OF FENCE.
5. DAMAGE TO ANY TREES DURING CONSTRUCTION SHALL BE ASSESSED BY UNIVERSITY ARBORIST AND THE UNIVERSITY ARBORIST SHALL STIPULATE WHAT ACTION WILL BE TAKEN FOR REMEDIATION OF DAMAGE. THE COST OF ANY AND ALL REMEDIATION WILL BE ASSUMED BY CONTRACTOR AT NO ADDITIONAL COST TO THE PROJECT.
6. DISTURBANCE OF ROOT ZONE UNDER DRIPLINE OF TREE, INCLUDING COMPACTION OF SOIL, CUTTING OR FILLING OR STORAGE OF MATERIALS SHALL QUALIFY AS DAMAGE AND SUBJECT TO REMEDIATION.

NO SCALE REVISED 8.28.14

Project Name: Cabinets and Vanities, 100 Level: Williams-Brice Stadium 100 Level and Suite 207 Renovations

Project Number: H27-Z332-K

University of South Carolina

CONTRACTOR'S ONE YEAR GUARANTEE

STATE OF _____

COUNTY OF _____

WE _____
as General Contractor on the above-named project, do hereby guarantee that all work executed under the requirements of the Contract Documents shall be free from defects due to faulty materials and /or workmanship for a period of one (1) year from date of acceptance of the work by the Owner and/or Architect/Engineer; and hereby agree to remedy defects due to faulty materials and/or workmanship, and pay for any damage resulting wherefrom, at no cost to the Owner, provided; however, that the following are excluded from this guarantee;

Defects or failures resulting from abuse by Owner.

Damage caused by fire, tornado, hail, hurricane, acts of God, wars, riots, or civil commotion.

[Name of Contracting Firm]

*By _____

Title _____

*Must be executed by an office of the Contracting Firm.

SWORN TO before me this _____ day of _____, 20____ (seal)

_____ State

My commission expires _____

06/5/2017

GENERAL NOTES: Cabinets and Vanities, 100 Level: Williams-Brice Stadium 100 Level and Suite 207 Renovations

Base Bid: Bidder is to provide and install (4) cabinet units with quartz countertops as indicated on the drawings and specifications.

Alternate 1: Bidder is to provide and install (2) vanity units with quartz countertops as indicated on the drawings and specifications.

For cabinet 3, bidder is to include shelf above base cabinet and all quartz components of serving bar element to include quartz waterfall, countertop and backsplash.

Any required wood blocking to be included.

Gypsum wall framing and gypsum wallboard is by others.

Flush wood wall paneling and base is by others.

Electrical, sink and plumbing are by others.

All work is to be complete by August 25, 2017.

SECTION 064113 - WOOD-VENEER-FACED ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Architectural wood cabinets.
 - 2. Wood furring, blocking, shims, and hanging strips for installing architectural wood cabinets unless concealed within other construction before cabinet installation.
 - 3. Shop finishing of architectural wood cabinets.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product, including panel products cabinet hardware and accessories finishing materials and processes.
- B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.
 - 1. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
 - 2. Show locations and sizes of cutouts and holes for electrical switches and outlets and other items installed in architectural wood cabinets.
 - 3. Show veneer leaves with dimensions, grain direction, exposed face, and identification numbers indicating the flitch and sequence within the flitch for each leaf.
 - 4. Apply AWI Quality Certification Program label to Shop Drawings.
- C. Samples for Initial Selection:
 - 1. Shop-applied transparent finishes.

- D. Samples for Verification:
 - 1. Lumber for transparent finish, not less than 5 inches wide by 12 inches long, for each species and cut, finished on one side and one edge.
 - 2. Exposed cabinet hardware and accessories, one unit for each type and finish.

- 1.5 INFORMATIONAL SUBMITTALS
 - A. Qualification Data: For fabricator.
 - B. Woodwork Quality Standard Compliance Certificates: AWI Quality Certification Program certificates.

- 1.6 QUALITY ASSURANCE
 - A. Fabricator Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance. Shop is a certified participant in AWI's Quality Certification Program.
 - B. Installer Qualifications: Fabricator of products.
 - C. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

- 1.7 DELIVERY, STORAGE, AND HANDLING
 - A. Do not deliver cabinets until painting and similar operations that could damage woodwork have been completed in installation areas. If cabinets must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

- 1.8 FIELD CONDITIONS
 - A. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.

- B. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity between 43 and 70 percent during the remainder of the construction period.
- C. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
 - 1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed, and indicate measurements on Shop Drawings.
- D. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.9 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that wood-veneer-faced architectural cabinets can be supported and installed as indicated.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CABINET FABRICATORS

- A. Source Limitations: Engage a qualified woodworking firm to assume undivided responsibility for production of architectural wood cabinets with sequence-matched wood veneers wood paneling and transparent-finished wood doors that are required to be of same species as woodwork.
- B. Fabricators: Subject to compliance with requirements, available fabricators offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Speciality Woodworks, Inc, Lexington, SC
 - 2. Coastal Millwork & Supply, Summerville, SC
 - 3. Lowcountry Case & Millwork, Ladsen, SC
 - 4. Designer Cabinetry by Flanders, Gaston, SC.

2.2 ARCHITECTURAL WOOD CABINETS, GENERAL

- A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades of architectural wood cabinets indicated for construction, finishes, installation, and other requirements.
1. Provide certificates from AWI certification program indicating that woodwork, including installation, complies with requirements of grades specified.
 2. The Contract Documents contain selections chosen from options in the quality standard and additional requirements beyond those of the quality standard. Comply with those selections and requirements in addition to the quality standard.

2.3 WOOD CABINETS FOR TRANSPARENT FINISH

- A. Grade: Custom.
- B. Type of Construction: Frameless.
- C. Cabinet and Door and Drawer Front Interface Style: Flush overlay .
- D. Wood for Exposed Surfaces:
1. Species: Cherry.
 2. Cut: Plain sliced/plain sawn.
 3. Grain Direction: Vertically for drawer fronts, doors, and fixed panels.
 4. Matching of Veneer Leaves: Book match.
 5. Veneer Matching within Panel Face: Center-balance match.
 6. Veneer Matching within Room: Provide cabinet veneers in each room or other space from a single flitch with doors, drawer fronts, and other surfaces matched in a sequenced set with continuous match where veneers are interrupted perpendicular to the grain.
- E. Semiexposed Surfaces: Provide surface materials indicated below:
1. Surfaces Other Than Drawer Bodies: Same species and cut indicated for exposed surfaces.
 2. Drawer Subfronts, Backs, and Sides: Solid-hardwood lumber, same species indicated for exposed surfaces.
 3. Drawer Bottoms: Hardwood plywood.
- F. Drawer Construction: Fabricate with exposed fronts fastened to subfront with mounting screws from interior of body.
1. Join subfronts, backs, and sides with glued rabbeted joints supplemented by mechanical fasteners.

2.4 WOOD MATERIALS

- A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.
 - 1. Do not use plain-sawn softwood lumber with exposed, flat surfaces more than 3 inches wide.
 - 2. Wood Moisture Content: 8 to 13 percent.
- B. Composite Wood and Agrifiber Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.
 - 1. Softwood Plywood: DOC PS 1.
 - 2. Veneer-Faced Panel Products (Hardwood Plywood): HPVA HP-1.

2.5 CABINET HARDWARE AND ACCESSORIES

- A. General: Provide cabinet hardware and accessory materials associated with architectural cabinets except for items specified in Section 087111 "Door Hardware (Descriptive Specification)."
- B. Sliding Door Hardware: Hafele: HAWA Symmetric 80/Z for bi-parting sliding doors. Provide all hardware necessary for complete assembly.
- C. Sliding Door Pull: Valli&Valli (Assa Abloy) K 1232; 26D Satin Chrome
- D. Frameless Concealed Hinges (European Type): BHMA A156.9, B01602, 135 degrees of opening, self-closing.
- E. Back-Mounted Pulls: BHMA A156.9, B02011. Hafele 112.83.903 Handle, Westin, Aluminum, Finish: Matt aluminum 160mm.
- F. Catches: Push-in magnetic catches, BHMA A156.9, B03131.
- G. Adjustable Shelf Standards and Supports: BHMA A156.9, B04102; with shelf brackets, B04112.
- H. Shelf Rests: BHMA A156.9, B04013; metal, two-pin type with shelf hold-down clip.
- I. Drawer Slides: BHMA A156.9.
 - 1. Grade 1HD-100 and Grade 1HD-200: Side mounted; full-extension type; zinc-plated-steel ball-bearing slides.
- J. Door and Drawer Silencers: BHMA A156.16, L03011.

2.6 MISCELLANEOUS MATERIALS

- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln dried to less than 15 percent moisture content.
- B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

2.7 FABRICATION

- A. Fabricate woodwork to dimensions, profiles, and details indicated. Ease edges to radius indicated for the following:
 - 1. Corners of Cabinets: 1/16 inch unless otherwise indicated.
- B. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
 - 1. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
 - 2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.
- C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

2.8 SHOP FINISHING

- A. General: Finish architectural wood cabinets at fabrication shop as specified in this Section. Defer only final touchup, cleaning, and polishing until after installation.
- B. Preparation for Finishing: Comply with referenced quality standard for sanding, filling countersunk fasteners, sealing concealed surfaces, and similar preparations for finishing architectural wood cabinets, as applicable to each unit of work.
 - 1. Backpriming: Apply one coat of sealer or primer, compatible with finish coats, to concealed surfaces of cabinets.

C. Transparent Finish:

1. Grade: Custom.
2. Finish: System - 5, conversion varnish.
3. Staining: Match Architect's sample.
4. Sheen: Satin, 31-45 gloss units measured on 60-degree gloss meter per ASTM D 523.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition cabinets to average prevailing humidity conditions in installation areas.
- B. Before installing cabinets, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming.

3.2 INSTALLATION

- A. Grade: Install cabinets to comply with same grade as item to be installed.
- B. Assemble cabinets and complete fabrication at Project site to the extent that it was not completed in the shop.
- C. Install cabinets level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches.
- D. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
- E. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.
 1. For shop finished items use filler matching finish of items being installed.
- F. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
 1. Install cabinets with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
 2. Maintain veneer sequence matching of cabinets with transparent finish.

3. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head screws sized for not less than 1-1/2-inch penetration into wood framing, blocking, or hanging strips.
- G. Touch up finishing work specified in this Section after installation of woodwork. Fill nail holes with matching filler where exposed.
 1. Apply specified finish coats, including stains and paste fillers if any, to exposed surfaces where only sealer/prime coats are applied in shop.

3.3 ADJUSTING AND CLEANING

- A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects; where not possible to repair, replace woodwork. Adjust joinery for uniform appearance.
- B. Clean, lubricate, and adjust hardware.
- C. Clean cabinets on exposed and semiexposed surfaces. Touch up shop-applied finishes to restore damaged or soiled areas.

END OF SECTION 064113

SECTION 123661 - SIMULATED STONE COUNTERTOPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Quartz agglomerate countertops and backsplashes.

1.3 ACTION SUBMITTALS

- A. Product Data: For countertop materials.
- B. Shop Drawings: For countertops. Show materials, finishes, edge and backsplash profiles, methods of joining, and cutouts for plumbing fixtures.
- C. Samples for Initial Selection: For each type of material exposed to view.
- D. Samples for Verification: For the following products:
 - 1. Countertop material, 6 inches square.

1.4 PROJECT CONDITIONS

- A. Field Measurements: Verify dimensions of countertops by field measurements after base cabinets are installed but before countertop fabrication is complete.

1.5 COORDINATION

- A. Coordinate locations of utilities that will penetrate countertops or backsplashes.

PART 2 - PRODUCTS

2.1 QUARTZ AGGLOMERATE COUNTERTOPS

- A. Configuration: Provide countertops with the following front and backsplash style:
 - 1. Front: Straight, slightly eased at top.
 - 2. Backsplash: Straight, slightly eased at corner.
 - 3. Endsplash: None.
 - 4. Jointery: Mitered at 90 degree corners
- B. Countertops: 2mm and 3mm thick (as indicated on drawings), quartz agglomerate with front edge built up with same material.
- C. Backsplashes: 3/4-inch- thick, quartz agglomerate[with wood-trimmed edges].
- D. Fabrication: Fabricate tops in one piece with shop-applied edges and backsplashes unless otherwise indicated. Comply with quartz agglomerate manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

2.2 COUNTERTOP MATERIALS

- A. Particleboard: ANSI A208.1, .
- B. Plywood: Exterior softwood plywood complying with DOC PS 1, Grade C-C Plugged, touch sanded.
- C. Quartz Agglomerate: Solid sheets consisting of quartz aggregates bound together with a matrix of filled plastic resin and complying with the "Physical Characteristics of Materials" Article of ANSI SS1.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Cambria.
 - b. Approved Equal.
 - 2. Colors and Patterns:
 - a. Color A: Cambria, Whitney - Bar Countertop, 3mm
 - b. Color B: Cambria, Menai - Typical Countertop, 3mm; backsplashes 2mm
 - c. Color C: Cambria, Minera - Bar front panel, 2mm

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install countertops level to a tolerance of 1/8 inch in 8 feet.
- B. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Pre-drill holes for screws as recommended by manufacturer. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.
 - 1. Install to comply with manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.
 - 2. Seal edges of cutouts in particleboard subtops by saturating with varnish.

END OF SECTION 123661