

**Project Name: USC Horseshoe Utility Brick Repair**  
**Project Number: FP00000070**  
**University of South Carolina**

**Addendum Number Three**

Date: May 17, 2018

From: Aimee Rish, Procurement Specialist



To: All Bidders

The following items add to, modify, clarify, or otherwise later the Drawings and/or specifications and will become a part of the Contract Documents. Where a portion of the Drawings and/or specifications is added to, modified, clarified, or otherwise altered, the portion shall not so affected shall remain. Bidder shall include all effects that these items may have on his proposal.

Acknowledgement receipt of this addendum in the space provided on the Bid Form. Failure to do so may subject a Bidder to disqualification.



**General**

1. The contractor will have a total of 65 days to complete the project with completion to be achieved by August 10, 2018. The work may not be continuous as the schedule must be sequenced with the completion of the utility work.
2. Reference Sheet L-1. Replace with the attached revised Sheet L-1 dated 5.17.18. Bidders shall price as Alternate One (1) the additional removal and replacement of approximately 100 LF of brick sidewalk within the project area as shown on each side of the primary area of repair. New brick shall be provided and installed by the contractor using 'Pathway Red 4x8', by Pine Hall Brick, laid following the detail for "Engraved Brick Pavers" on sheet L-2. Site preparation by the contractor shall include removal of existing base material and subgrade to provide a 6" crushed stone base. Pattern shall be a modified basket weave. Provide black or brown aluminum angle edging.
3. All brick walks without mortared base and joints shall be installed with a black or brown aluminum angle edging.

4. The temporary laydown area with fencing requirement has been deleted. Laydown space will be provided within the existing fenced area of the utility project.

**END OF ADDENDUM**

SUMTER STREET

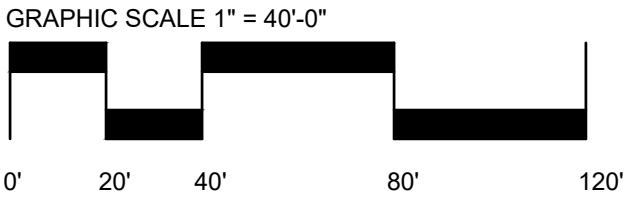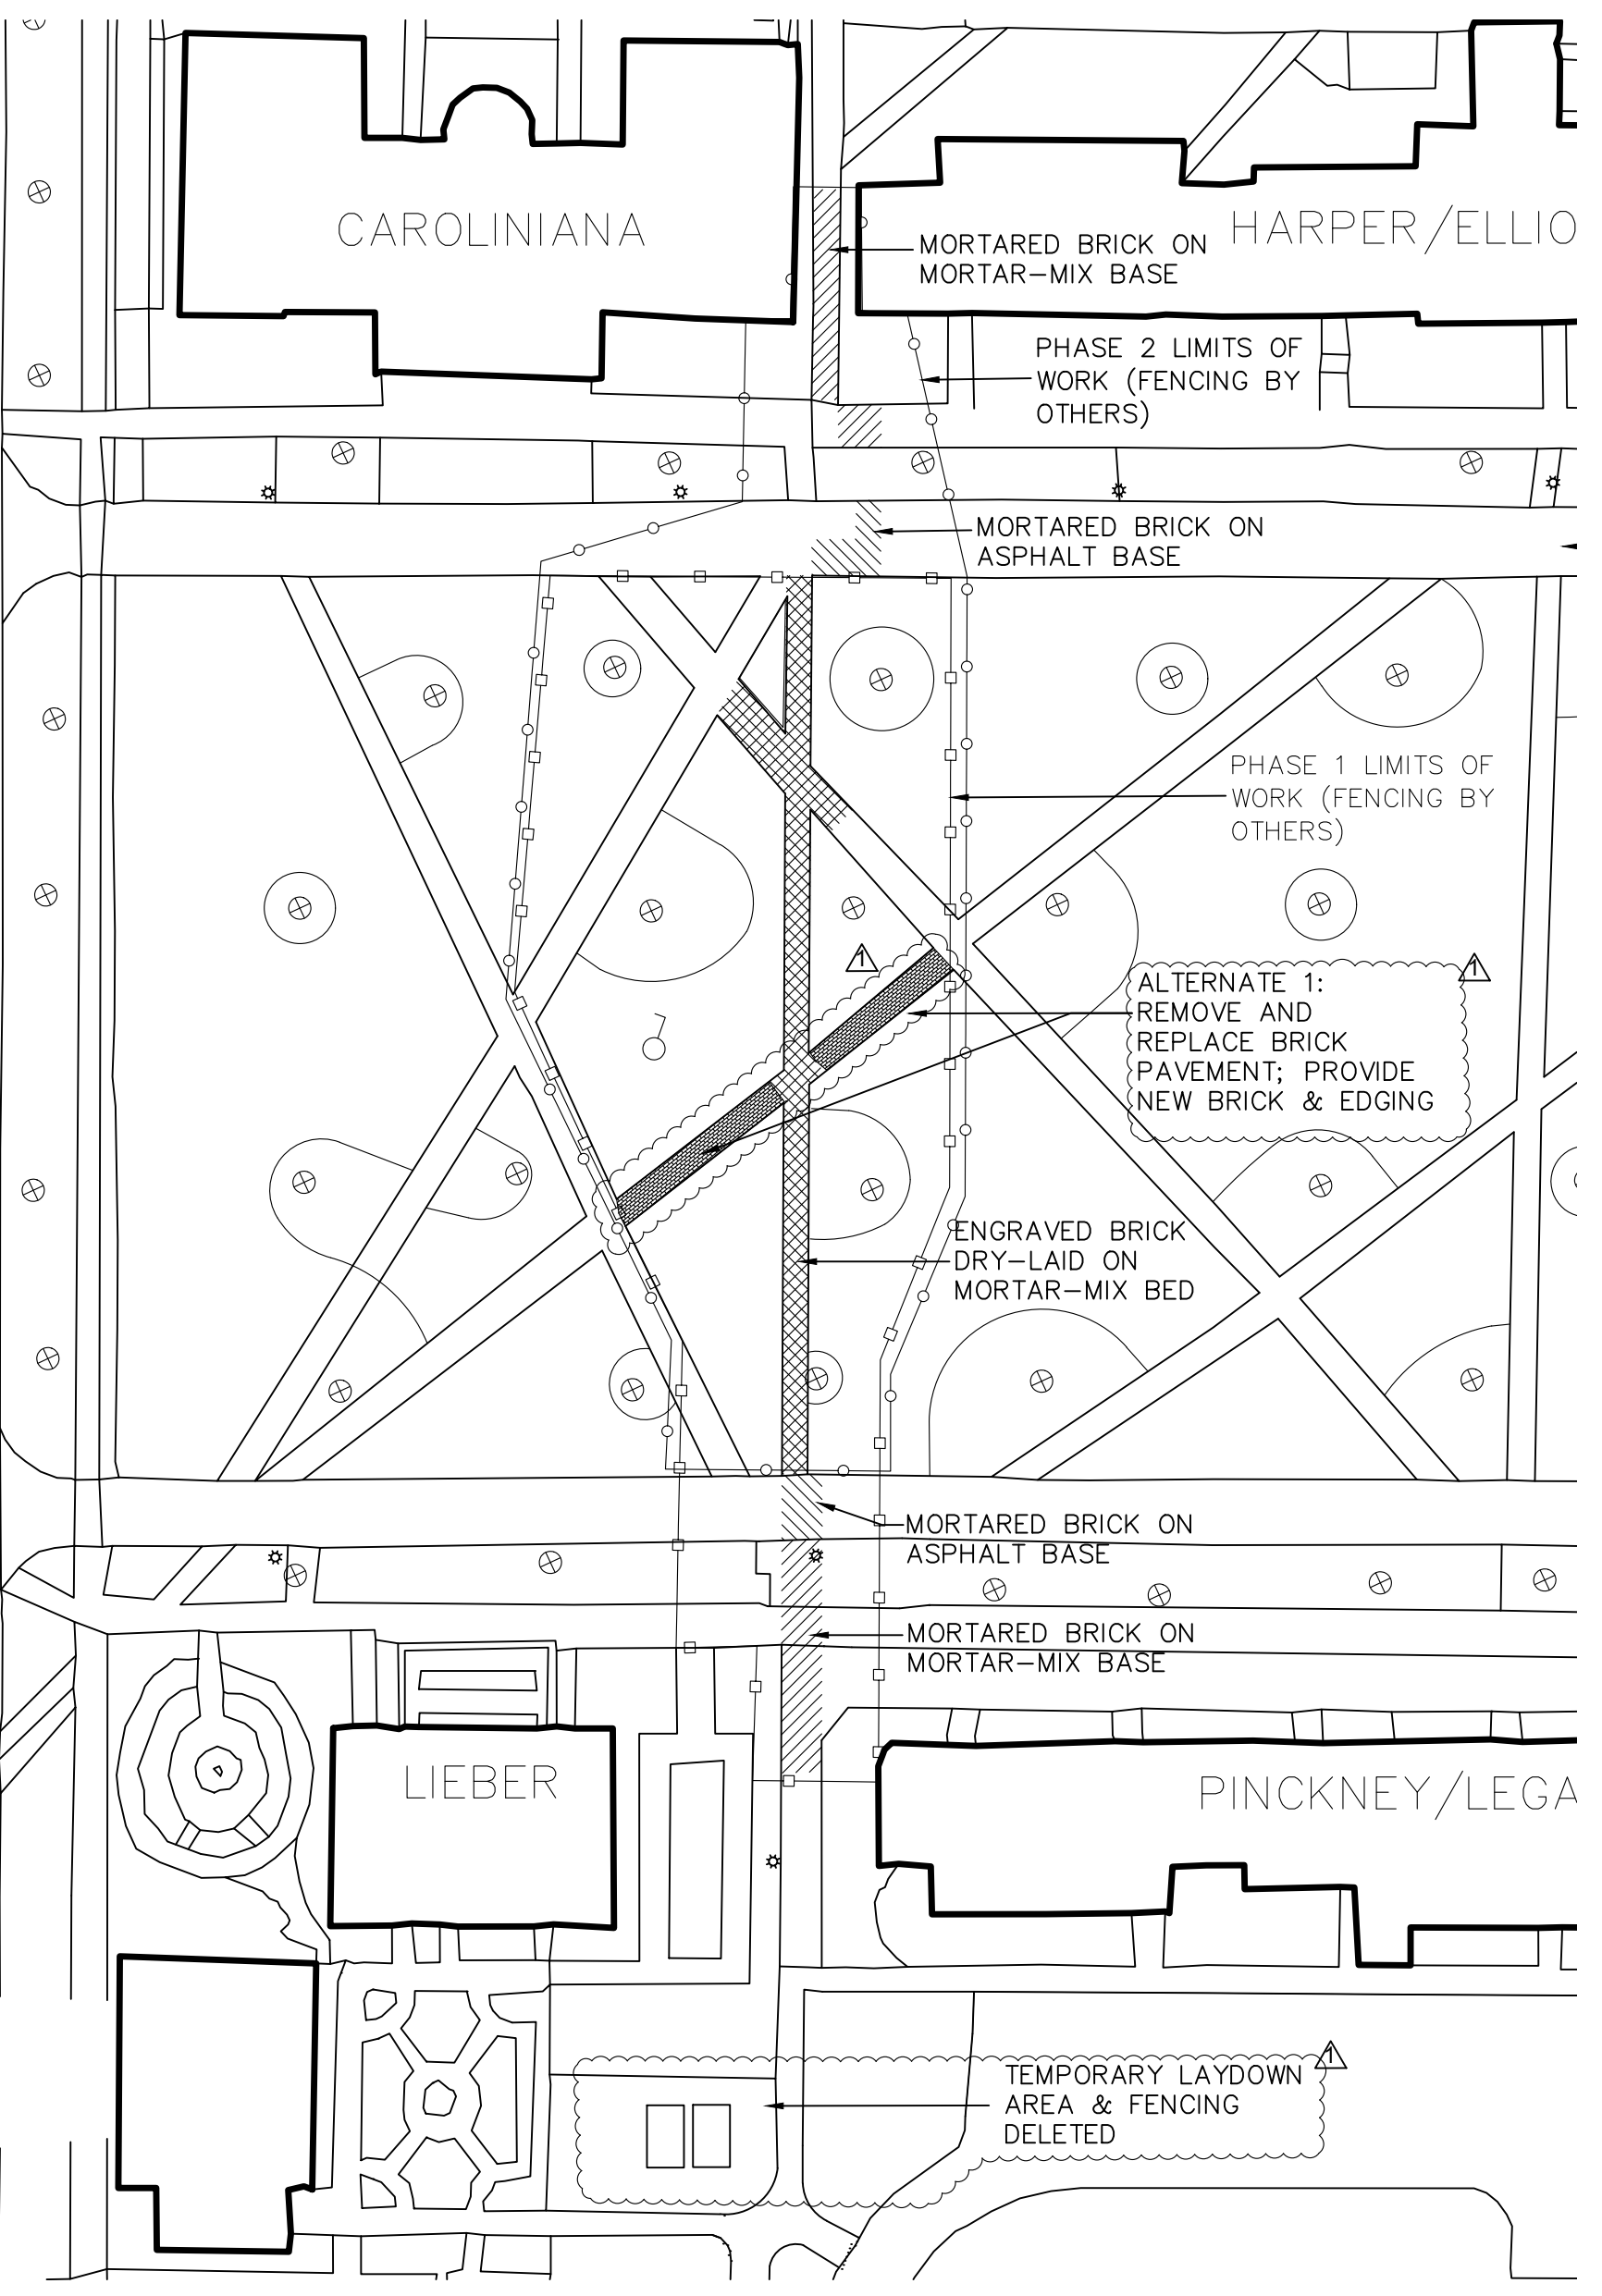

SHEETS IN SET: 1 OF 2 L-1	PROJECT TITLE: <b>UTILITY BRICK REPAIR USC HORSESHOE</b>	BUILDING: <b>###</b>	DRAWING: <b>###</b>	DATE: <b>15 APR 18</b>	DRAWN BY: <b>EFJ</b>	CHECKED BY: <b>EFJ</b>	SEAL:
	University of South Carolina	REV. 1. ALTERNATE 1 ADDITIONAL PAVEMENT; LAYDOWN AREA DELETED	DESCRIPTION	DATE 5.17.18	ORIG. BY	DRAWN BY	CAMPUS PLANNING AND CONSTRUCTION COLUMBIA, SC 29208